

Marvell® Alaska 88E1512

Integrated 10/100/1000 Mbps Energy Efficient Ethernet Transceiver

Overview


Marvell® Alaska® 88E1512 Gigabit Ethernet (GbE) transceiver is a physical layer device containing a single Gigabit Ethernet transceiver. The transceiver implements the Ethernet physical layer portion of the 1000BASE-T, 100BASE-TX, and 10BASE-T standards. The device supports RGMII (Reduced pin count GMII for direct connection) to Copper/Fiber/SGMII with Auto-Media Detect, RGMII to Copper, RGMII to SGMII/Fiber, and SGMII to Copper.

The device also integrates MDI interface termination resistors into the PHY. This resistor integration simplifies board layout and reduces board cost by reducing the number of external components. The new Marvell calibrated resistor scheme will achieve and exceed the accuracy requirements of the IEEE 802.3 return loss specifications.

The 88E1512 device has an integrated switching voltage regulator to generate all required voltages and can run off a single 3.3V supply; the device supports 1.8V, 2.5V, and 3.3V LVCMOS I/O Standards. This device uses advanced mixedsignal processing to perform equalization, echo and crosstalk cancellation, data recovery, and error correction at a gigabit per second data rate. The 88E1512 achieves robust performance in noisy environments with very low power dissipation.

The Alaska family of transceiver products provides the ideal solution for rapid development and deployment of gigabit standalone and switching systems for the Enterprise, embedded, consumer, and Metro/service provider market segments.

Block Diagram

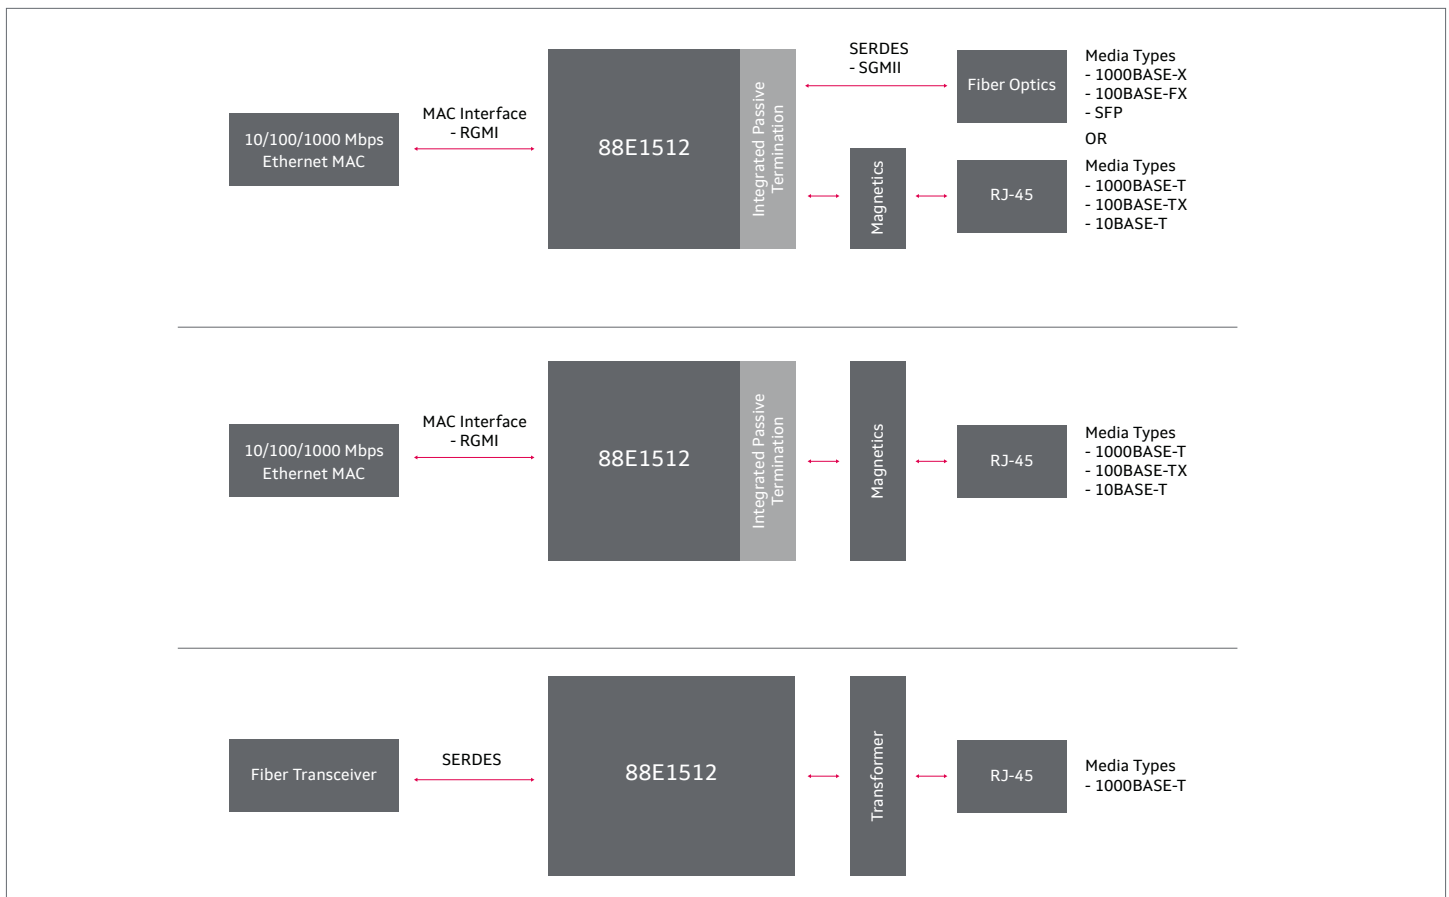

Key Features

Features	Benefits
Four RGMII timing modes including integrated delays	<ul style="list-style-type: none">• This eliminates the need for adding additional trace delays on the PCB
Supports Energy Efficient Ethernet (EEE) - Including EEE buffering for legacy MAC devices	<ul style="list-style-type: none">• Extended energy savings through incorporation of the IEEE 802.3az standard- Additional support added to allow EEE enablement on non-EEE MACs
IEEE1588 version 2 Time Stamping and Synchronous Ethernet (SyncE) Clock Recovery	<ul style="list-style-type: none">• Enabling frequency and/or clock synchronization for time sensitive applications and environments
Advanced Virtual Cable Tester® (VCT™)	<ul style="list-style-type: none">• Detects and reports potential cabling issues to within one meter of the distance to the fault
56-pin QFN 8mm x 8mm Green package	<ul style="list-style-type: none">• Environmentally friendly, small form factor for minimal real estate requirements

Target Applications

The Alaska 88E1512 Transceivers deliver optimal physical layer interfacing and features for a broad range of applications within the Enterprise, embedded, consumer, and Metro/service provider market segments.

The Alaska 88E1512 family provides complete GbE transceiver solutions with complete software compatibility. To shorten system manufacturers design cycles and accelerate time-to-market, Marvell provides complete Alaska reference designs and supporting docs with schematics, layout files and other documentation.



To deliver the data infrastructure technology that connects the world, we're building solutions on the most powerful foundation: our partnerships with our customers. Trusted by the world's leading technology companies for 25 years, we move, store, process and secure the world's data with semiconductor solutions designed for our customers' current needs and future ambitions. Through a process of deep collaboration and transparency, we're ultimately changing the way tomorrow's enterprise, cloud, automotive, and carrier architectures transform—for the better.

Copyright © 2023 Marvell. All rights reserved. Marvell and the Marvell logo are trademarks of Marvell or its affiliates. Please visit www.marvell.com for a complete list of Marvell trademarks. Other names and brands may be claimed as the property of others.

Marvell_88E1512_PB Revised: 05/23