

### PRODUCT OVERVIEW

Marvell, a market leader of PCIe to SATA embedded controller devices, has added the Marvell® 88SE9220 and Marvell 88SE9230 host controllers as cost-effective solutions for connecting Serial ATA (SATA) peripherals. The Marvell 88SE9220 and 88SE9230 connect SATA III devices to a PCI Express (PCIe) 2.0 host, delivering up to 1 Gigabyte-per-second (GB/s) bandwidth. Each host controller supports two or four 6 gigabit-per-second (Gb/s) SATA peripheral interface ports and a two-lane 5.0 Gb/s PCIe host interface. In addition, it features hardware RAID running with an enhanced ARM-based processor to offload the host CPU; Marvell proprietary Marvell HyperDuo technology for automated solid-state drive (SSD)/hard disk drive(HDD) tiering; on-the-fly AES 128/256-bit encryption for connected SATA SSD/HDD devices; and AHCI interface for in-box driver support. A complete suite of RAID 0/1/10 and HyperDuo software is provided, including the OS device driver, BIOS/Firmware and management utility. The Marvell 88SE9220 and 88SE9230 host controllers allow for a small footprint, highly integrated SATA III design that will enable high-performing yet cost-effective HDD, SSD and other peripheral designs

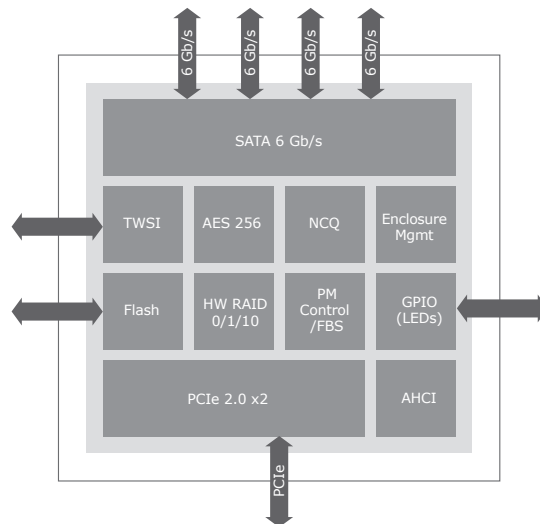


Fig 1. Block Diagram for Marvell 88SE9230

MODEL	88SE9220	88SE9230	88SE9235
• Marvell RAID Software	Yes	Yes	No
• Marvell HyperDuo	Yes	Yes	No
• 6 Gb/s SATA Ports	2	4	4
• SATA 3.0 Compliant	6 Gb/s SATA PHY with speed negotiation to backward support 3 Gb/s and 1.5 Gb/s		
• PCIe 2.0 Compliant	Support 1x or 2x PCI Express 2.0 interface (5.0 Gb/s)		
• Native Command Queuing	32 outstanding commands per port for high performance		
• eSATA Support	Flexible SATA ports support internal or external (up to 5m) SATA links		
• Hardware RAID	Yes, RAID 0/1	Yes, RAID 0/1/10	No
• AES Encryption	Yes, 128/256-bit AES	Yes, 128/256-bit AES	No
• AHCI Inbox Driver Support	Yes	Yes	Yes
• Enclosure Management	I2C support		
• Two-Wire Serial Interface (TWSI)	Interface for external EEPROM containing configuration information		
• GPIO Support	LEDs status monitoring		
• SPI Flash Interface	External flash containing configuration data and/or boot code		
• Port Multiplier Support	Yes	Yes	Yes
• FIS-Based Switching	Better performance with simultaneous commands		
• On-Chip Oscillator	Low-cost crystal support		
• Power	1W	1W	1W
• Package Size/Type	7mm×7mm / 56-pin QFN	9mm×9mm / 76-pin QFN	9mm×9mm / 76-pin QFN

## ▶ APPLICATIONS

The Marvell 88SE9220 and 88SE9230 SATA host controllers are ideal solutions for RAID on motherboard (ROMB) and cost-effective host bus adapters (HBAs). It allows PCIe-based host systems to control up to four SATA 6Gb/s HDDs or SSDs. An embedded ARM-based CPU makes this product a pure hardware RAID controller and enables in-box driver support without additional driver installation. The included Marvell Storage Utility (MSU) provides a user-friendly interface to end users, while the Marvell RAID driver allows the drives to be used with a SATA port multiplier for increased system performance and capacity.

The Marvell HyperDuo offers a breakthrough embedded technology for new generation 6Gb/s SATA Controllers, enabled on the Marvell 88SE9230 and 88SE9220. Based on years of research and patent-pending software and hardware, HyperDuo enables 80 percent of the performance of an SSD at less than half the cost. Configured with one hard drive and multiple SSDs, HyperDuo uses intelligent algorithms to automatically migrate hot data to the SSD while enabling all data to be safely stored on a larger capacity SATA HDD for higher input/output operations per second (IOPS), throughput and capacity.

The Marvell 88SE9235 can be used for embedded platform applications such as home NAS/media servers, DVR/NVR and set-top boxes, or by HBA vendors to develop their own RAID software or in-box OS drivers.

Fully programmable on-chip transceivers support SATA, eSATA, and xSATA at 6 Gb/s and are backward compatible to 1.5 Gb/s and 3 Gb/s. Built-in support for SATA Port Multipliers with FIS-based switching ensures maximum performance. The small footprint of the device, and the few required external components, take up minimal board space, easing system design and reducing cost. Embedded enclosure management via I2C protocol, further reduces system cost.

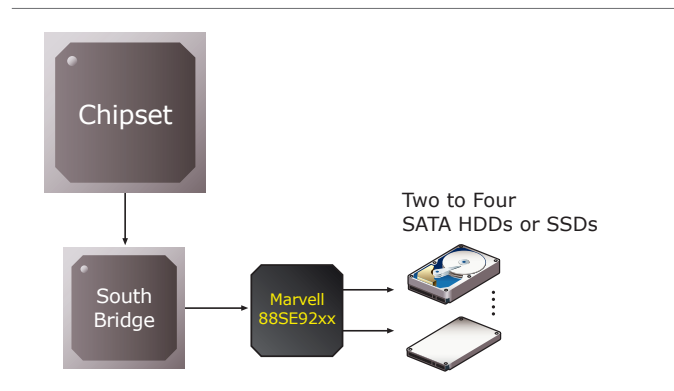


Fig 2. RAID-On-Motherboard Application

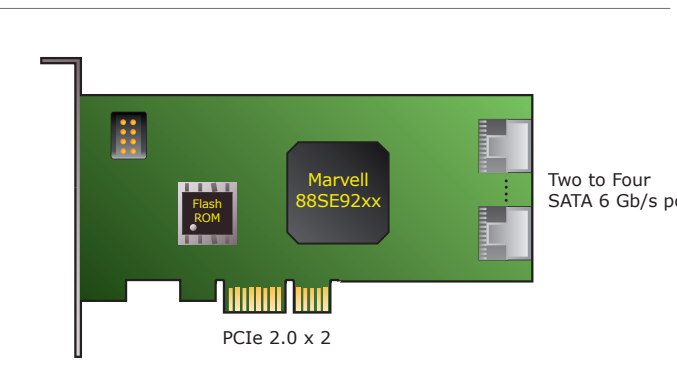


Fig 3. SATA RAID HBA Application

**THE MARVELL ADVANTAGE:** Marvell chipsets come with complete reference designs which include board layout designs, software, manufacturing diagnostic tools, documentation, and other items to assist customers with product evaluation and production. Marvell's worldwide field application engineers collaborate closely with end customers to develop and deliver new leading-edge products for quick time-to-market. Marvell utilizes world-leading semiconductor foundry and packaging services to reliably deliver high-volume and low-cost total solutions.

**ABOUT MARVELL:** Marvell is a leader in storage, communications, and consumer silicon solutions. Marvell's diverse product portfolio includes switching, transceiver, communications controller, processor, wireless, power management, and storage solutions that power the entire communications infrastructure, including enterprise, metro, home, storage, and digital entertainment solutions. For more information, visit our Web site at [www.marvell.com](http://www.marvell.com).



Marvell Semiconductor, Inc.  
5488 Marvell Lane  
Santa Clara, CA 95054  
Phone 408.222.2500  
[www.marvell.com](http://www.marvell.com)

Copyright © 2011. Marvell International Ltd. All rights reserved. Marvell, and the Marvell logo are registered trademarks of Marvell or its affiliates. All other trademarks are the property of their respective owners.

88SE92xx-001 12/11