

Marvell® AQtion AQC111U & AQC112U

USB 3.1 Multi-Gig Ethernet Controllers for Adapters, Docking Stations and On-board LAN

Overview


The Marvell AQtion AQC111U and AQC112U are Universal Serial Bus 3 (USB) to Multi-Gig Ethernet controllers that integrate a USB v3.1 Gen1 PHY and 5GBASE-T/2.5GBASE-T MAC+PHY in single-chip packages. These high performance, small footprint devices enable low-cost, small form factor docking stations and adapters for simple plug-and-play, Multi-Gig Ethernet network connection capabilities, suitable for a wide variety of applications. These Ethernet controllers enable a new class of accessories for laptop users who want mobility combined with the reliability and performance of wired Multi-Gig Ethernet connectivity when at their desks or on the road.

These new controllers enable the perfect solution for notebook users. The ubiquity of the USB connection also makes the

adapters and docking stations based on the AQC111U and AQC112U suitable for use with desktops, game consoles, home gateways or any system with a USB 3.x port that would benefit from a high-speed network connection.

All AQtion controllers incorporate Marvell's AQrate PHY technology, that supports data rates of up to 5 Gbps, a USB host controller, and is compliant with USB v3.1, v3.0, v2.0, and v1.1 specifications. These devices implement Multi-Gig Ethernet functionality with the AQC111U integrating a four-speed Ethernet PHY (5GBASE-T/2.5GBASE-T/1000BASE-T/100BASE-TX), while the AQC112U integrates a three-speed Ethernet PHY (2.5GBASE-T/1000BASE-T/100BASE-TX).

Block Diagram

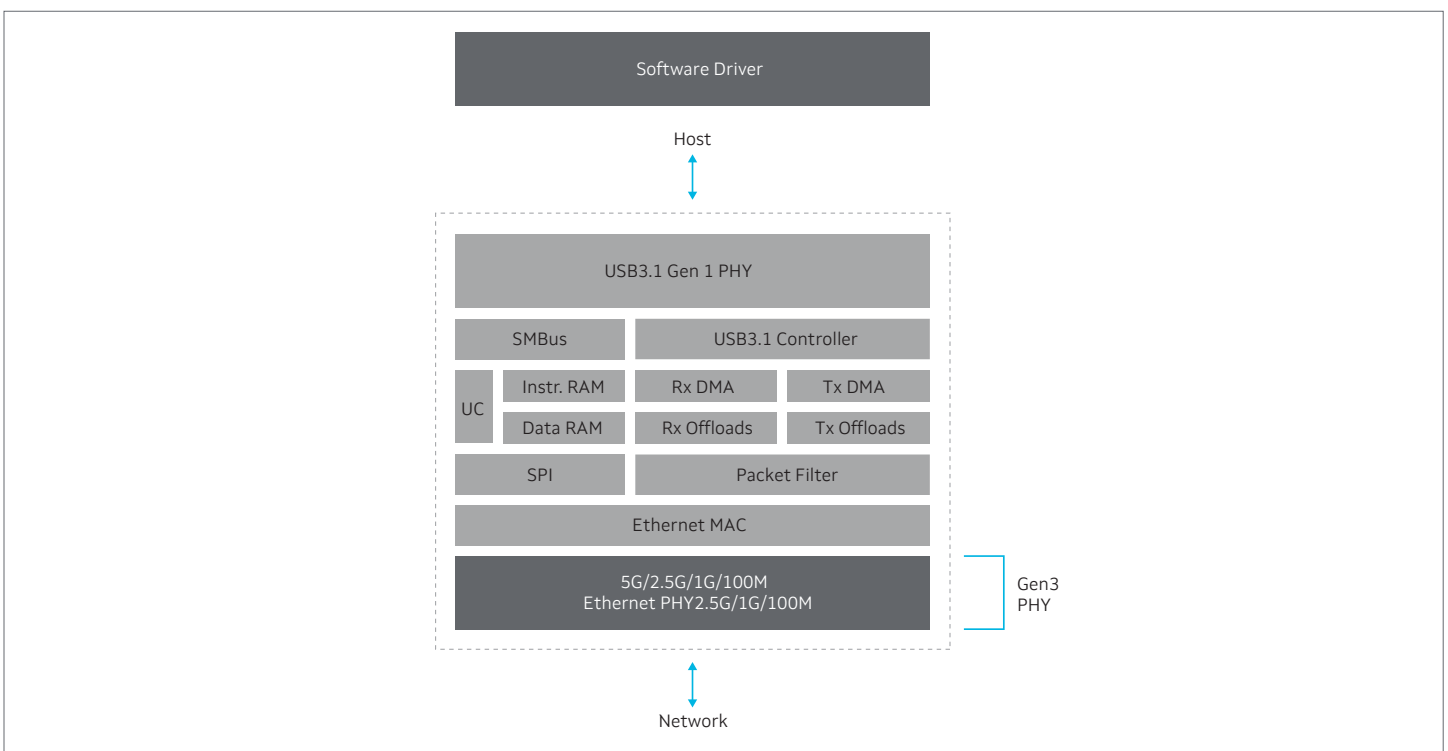

AQC111U & AQC112U

Key Features

Features	Benefits
Single-chip solution	<ul style="list-style-type: none">• Integrated PCIe, MAC, and PHY minimizes board space and power utilization
Integrated USB v3.1 Gen1 PHY	<ul style="list-style-type: none">• Supports line rates of up to 5 Gbps
Integrated USB Device Controller	<ul style="list-style-type: none">• USB v3.1/3.0/2.0/1.1-compliant• Supports USB v3.1 Gen1 power saving modes (U0/U1/U2/U3)• Provides USB Super/High/Full-Speed modes with bus or self-powered device• Supports virtual CD-ROM storage for driver
USB Power Delivery (PD) v2.0	<ul style="list-style-type: none">• Provides USB Type-C port capable of operating as a Downstream Facing Port (DFP) or Upstream Facing Port (UFP)• Supports two USB Type-C Configuration Channel (CC) ports• Provides integrated Baseboard Management Controller (BMC) Encode/Decode PHY
Advanced Security Features	<ul style="list-style-type: none">• Firmware anti-tampering security:<ul style="list-style-type: none">- Secure Hash Algorithm (SHA-2) authentication- RSA public-key encryption
128-Byte Programmable eFuse	<ul style="list-style-type: none">• Supports security keys and stores device-related information
SPI FLASH Interface	<ul style="list-style-type: none">• Supports external FLASH for storing USB ID and Ethernet MAC address
Package	<ul style="list-style-type: none">• 224-pin Ball Grid Array (BGA), 12 mm x 14 mm• Commercial temperature range (0°C –108°C)

PHY & MAC Features and Benefits

PHY Features & Benefits

- | | |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| AQrate PHY with NBASE-T technology | • Supports 100 meters on Cat 5e at 5G/2.5G/1G/100M |
| Advanced Cable Diagnostics | • On-chip high-resolution cable analyzer |
| Energy Efficient Ethernet (EEE) | • Advanced PHY power savings |
| Power over Ethernet (PoE) | • I ² C master for external PoE controller
• PoE AT Type-2 or AF information notice for CPU via GPIO pin |

MAC Features & Benefits

- | | |
|-----------------------------------------------|-----------------------------------------------------------------------|
| Wake-on-LAN (WoL) Power Management | • Supports lower power modes |
| Quality of Service (QoS) support | • Supports up to eight traffic classes and Data Center Bridging (DCB) |
| Jumbo frames (up to 16Kbyte) | • Improved network performance with reduce CPU utilization |
| IPv4, IPv6/TCP, and IPv6/UDP checksum offload | • Offloading calculations and improved CPU usage |

Ethernet Controller/Chip Features

- | | |
|------------------------------------|-------------------------------------------------------------------------------------|
| Advanced Power Management Features | • Power management offload (ARP and NS requests)
• Multicast DNS (mDNS) offloads |
|------------------------------------|-------------------------------------------------------------------------------------|

Target Applications

Marvell AQtion AQC111U and AQC112U controllers are ideally suited for use in desktops, notebook PCs, ultrabooks, docking stations, game consoles, digital-home appliances, network printers, USB dongles, IP Set-Top Box (STB) and IP televisions, and virtually any embedded system that uses a standard USB port.



To deliver the data infrastructure technology that connects the world, we're building solutions on the most powerful foundation: our partnerships with our customers. Trusted by the world's leading technology companies for 25 years, we move, store, process and secure the world's data with semiconductor solutions designed for our customers' current needs and future ambitions. Through a process of deep collaboration and transparency, we're ultimately changing the way tomorrow's enterprise, cloud, automotive, and carrier architectures transform—for the better.

Copyright © 2020 Marvell. All rights reserved. Marvell and the Marvell logo are trademarks of Marvell or its affiliates. Please visit www.marvell.com for a complete list of Marvell trademarks. Other names and brands may be claimed as the property of others.

Marvell_AQC111U & AQC112U_PB Revised: 11/20