

Marvell 88SE9170 / 88SE9171 / 88SE9182

PCIe 2.0 to 6Gbps SATA I/O Host Controller

PRODUCT OVERVIEW

The Marvell® 88SE917X and 88SE9182 host controllers offer cost effective solutions for connecting Serial ATA (SATA) devices to a PCI Express (PCIe) 2.0 host. The SE889170 and the 88SE9171 each have a one-lane PCIe end-point interface at 5Gb/s. The 88SE9170 offers two SATA3 host ports, while the 88SE9171 offers a single SATA3 host port. All SATA ports support 6Gb/s, 3Gb/s and 1.5Gb/s interface speeds. The 88SE9182 device offers the same Dual SATA interface as the 88SE9170, but has a two-lane PCIe interface for additional host bandwidth. All devices feature a standard AHCI interface and inbox driver support (Windows 7/8/10, Linux, and MAC) for ease of use and fast time-to-market.

BLOCK DIAGRAM

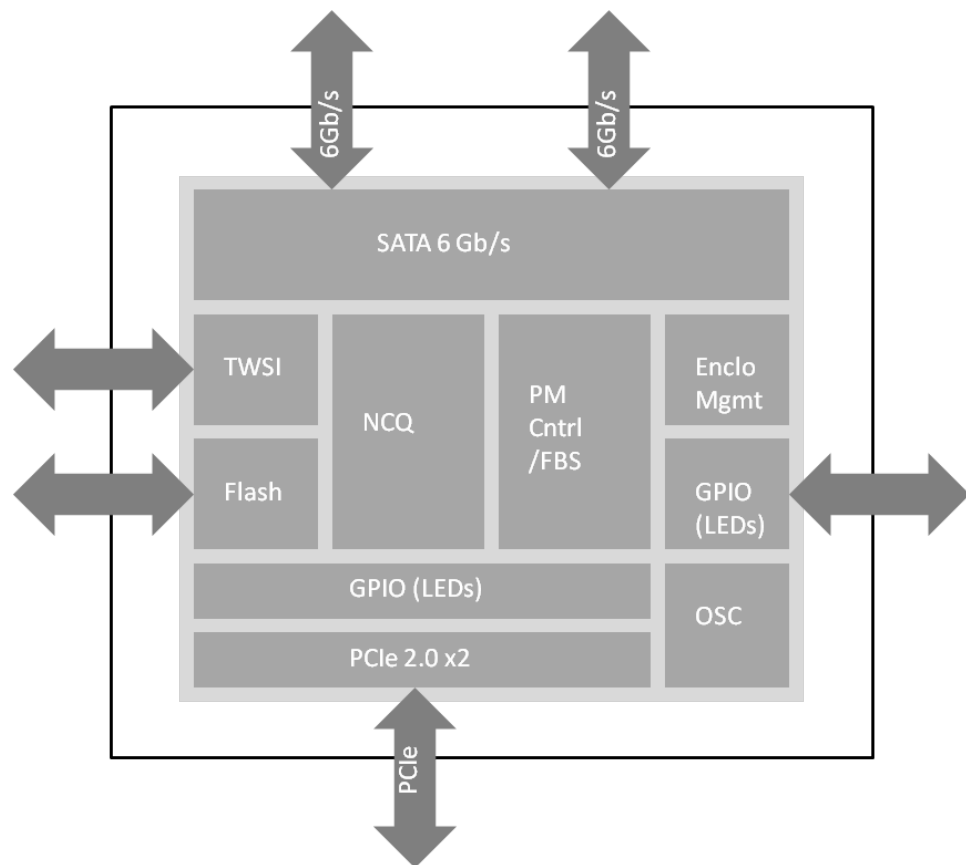


Fig 1. Block Diagram - 88SE9182 PCIe 2.0 to 2 Port 6Gbps SATA I/O Host Controller

KEY FEATURES

FEATURES	88SE9170	88SE9171	88SE9182
SATA Ports	<ul style="list-style-type: none"> Dual 6Gbps SATA ports 	<ul style="list-style-type: none"> Single 6Gbps SATA port 	<ul style="list-style-type: none"> Dual 6Gbps SATA ports
Port Multiplier Support	<ul style="list-style-type: none"> Yes 	<ul style="list-style-type: none"> Yes 	<ul style="list-style-type: none"> Yes
PCIe Interface	<ul style="list-style-type: none"> PCIe2.0 x1 	<ul style="list-style-type: none"> PCIe2.0 x1 	<ul style="list-style-type: none"> PCIe2.0 x2
Status Monitoring	<ul style="list-style-type: none"> GPIO pins for SATA link status and activity LEDs 		
Native Command Queuing	<ul style="list-style-type: none"> 32 outstanding commands per SATA port for high performance 		
AHCI Driver Support	<ul style="list-style-type: none"> Yes 		
SPI Flash Interface	<ul style="list-style-type: none"> External flash containing configuration and/or Legacy/UEFI BIOS 		
On-Chip Oscillator	<ul style="list-style-type: none"> Low-cost crystal support 		
Automotive Temperature	<ul style="list-style-type: none"> Yes 	<ul style="list-style-type: none"> Yes 	<ul style="list-style-type: none"> Yes
Package	<ul style="list-style-type: none"> 7mm x 7mm 56pin QFN 		
Power Consumption	<ul style="list-style-type: none"> <1W 		
Power Regulation	<ul style="list-style-type: none"> Internal LDO voltage regulator for low cost system design 		

TARGET APPLICATIONS

The Marvell® 88SE917X and 88SE9182 host controllers are ideal solutions for small embedded systems needing SATA connectivity or systems with special temperature or power requirements. These SATA controllers allow a PCIe-based host system to control up to two 6Gb/s SATA devices via direct connection. Built-in support for SATA port multipliers with FIS based switching ensures system scalability with maximum performance.

The small footprint of the device and the very few required external components occupy a minimal amount of board space, easing system design and reducing cost. The devices are available with optional industrial and automotive temperature grade certification opening up a broad range of applications requiring flexible storage solutions in harsh environments.

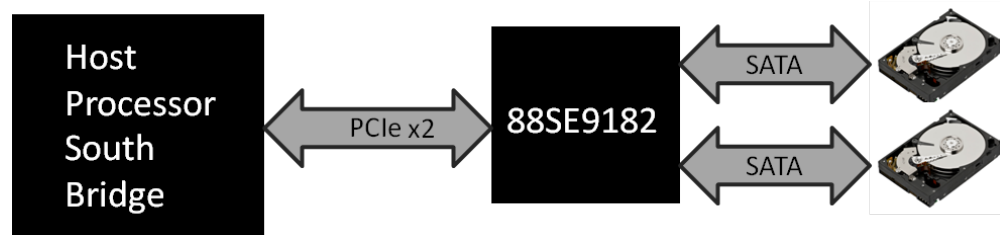


Fig 2. Typical Two Disk Application Example of 88SE9182



ABOUT MARVELL TECHNOLOGY GROUP: Marvell is a global leader in providing complete silicon solutions and Kinoma® software, enabling the “Smart Life and Smart Lifestyle.” From storage to cloud infrastructure, Internet of Things (IoT), connectivity and multimedia, Marvell’s diverse product portfolio aligns complete platform designs with industry-leading performance, security, reliability and efficiency. For additional information, including Marvell’s sales offices and representatives, please visit our website at www.marvell.com.

Copyright © 2016 Marvell. All rights reserved. Marvell and the Marvell logo are registered trademarks of Marvell. MoChi is a trademark of Marvell. All other trademarks are the property of their respective owners. Part Number: Marvell_88SE14XX_516. Revision: May-2016