

# Marvell® ALASKA® 88E1512P/14P Low Latency PHY

Integrated 10/100/1000 Mbps Energy Efficient Ethernet Transceivers for Industrial Applications.

---

## PRODUCT OVERVIEW

Marvell® Alaska® 88E1512P and 88E1514P Gigabit Ethernet Transceivers are physical layer devices containing a single Gigabit Ethernet transceiver. The transceiver implements the Ethernet physical layer portion of the 1000BASE-T, 100BASE-TX, and 10BASE-T standards.

The transceiver was designed for industrial applications where low and deterministic latency through the PHY enables real-time applications. Higher layer protocols such as EtherCAT/Profinet can utilize this low latency device to guarantee quality of service in real-time automation systems.

In addition to supporting Energy Efficient Ethernet (EEE) on the new generation of enabled MACs, these products are also capable of implementing EEE with legacy or non-EEE devices by incorporating EEE buffering. The 88E1512P device supports RGMII (Reduced pin count GMII for direct connection) to Copper/Fiber/SGMII with Auto-Media Detect, RGMII to Copper, RGMII to SGMII/Fiber, and SGMII to Copper. The 88E1514P device supports SGMII/Fiber to Copper only.

The device also integrates MDI interface termination resistors into the PHY. This resistor integration simplifies board layout and reduces board cost by reducing the number of external components. The new Marvell calibrated resistor scheme will achieve and exceed the accuracy requirements of the IEEE 802.3 return loss specifications.

The 88E1512P and 88E1514P devices have an integrated switching voltage regulator to generate all required voltages and can run off a single 3.3V supply; the device supports 1.8V, 2.5V, and 3.3V LVCMOS I/O Standards. This device uses advanced mixed-signal processing to perform equalization, echo and crosstalk cancellation, data recovery, and error correction at a gigabit per second data rate. The 88E1512P and 88E1514P achieve robust performance in noisy environments with very low power dissipation.

The Alaska family of transceiver products provides the ideal solution for rapid development and deployment of gigabit standalone and switching systems for the Enterprise, Industrial, embedded, and Metro/service provider market segments.

## TARGET APPLICATIONS

- Wireless Backhaul applications
- Industrial Automation
- Internet of Things (IoT) Gateways
- General Purpose Embedded Controller

## APPLICATION DIAGRAMS

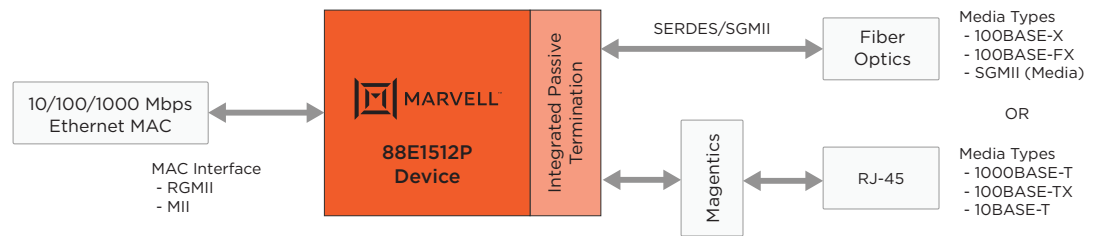


Figure 1: RGMII to Copper/Fiber/RGMII Auto-media Application

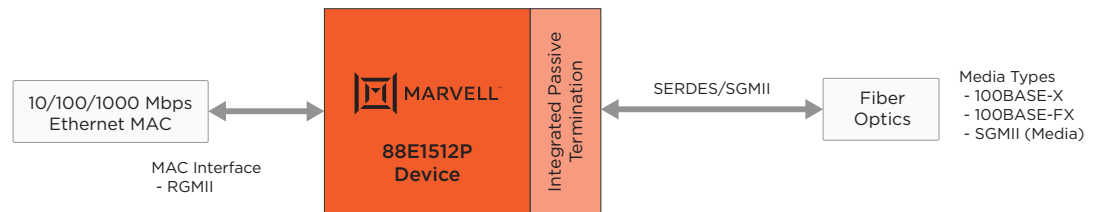


Figure 2: RGMII to Fiber/RGMII Application

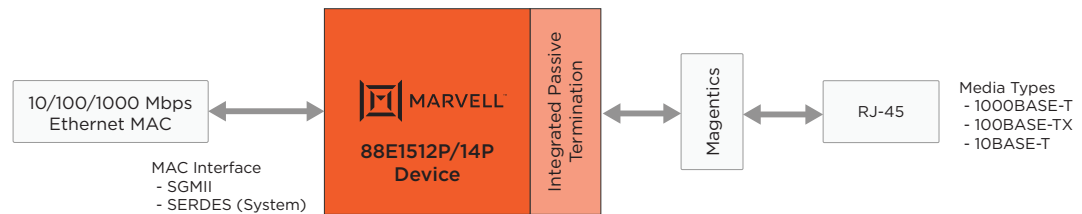


Figure 3: SGMII to Copper Application

## KEY FEATURES AND BENEFITS

FEATURES	BENEFITS
Low Latency	<ul style="list-style-type: none"><li>Reduces the PHY latency (transmit and receive) by up to 40 percent compared to non-optimized designs</li><li>Total (RX+TX) latency &lt; 400 ns (for both 100BASE-TX and 1000BASE-T modes with 1518 byte frames)</li></ul>
EEE Support (IEEE 802.3az): Implements EEE with legacy or non-EEE MAC	<ul style="list-style-type: none"><li>Extended energy savings through incorporation of the IEEE 802.3az standard</li></ul>
Synchronous Ethernet	<ul style="list-style-type: none"><li>Accurate and low-cost clock recovery for Time-aware applications</li></ul>
IEEE 1588v2 support with hardware acceleration	<ul style="list-style-type: none"><li>Enables applications such as industrial automation and wireless backhaul with highly accurate Precision Time Protocol</li><li>Supports hardware accelerated 2-Step PTP and 1-Step PTP</li></ul>
Integrated Switching Voltage Regulator	<ul style="list-style-type: none"><li>Allows devices to run off single 3.3V supply</li></ul>
Wake on LAN (WoL)	<ul style="list-style-type: none"><li>Power savings through programmable lower power (S5) event/pattern and link change detection</li></ul>
Advanced Virtual Cable Tester® (VCT™)	<ul style="list-style-type: none"><li>Detects and reports potential cabling issues to within one meter of the distance to the fault</li></ul>
Expanded PHY addresses	<ul style="list-style-type: none"><li>Offers 16 PHY addresses for easier programming</li></ul>
Extended Temperature Range	<ul style="list-style-type: none"><li>Industrial Grade enables operation in harsh environments with ambient operating range (-40 to +85C) and maximum junction temperature (+125C)</li></ul>
56-pin QFN 8mm x 8mm Green package	<ul style="list-style-type: none"><li>Environmentally friendly, small form factor for minimal real estate requirements</li></ul>



To deliver the data infrastructure technology that connects the world, we're building solutions on the most powerful foundation: our partnerships with our customers. Trusted by the world's leading technology companies for 25 years, we move, store, process and secure the world's data with semiconductor solutions designed for our customers' current needs and future ambitions. Through a process of deep collaboration and transparency, we're ultimately changing the way tomorrow's enterprise, cloud, automotive, and carrier architectures transform—for the better.

Copyright © 2022 Marvell. All rights reserved. Marvell and the Marvell logo are trademarks of Marvell or its affiliates. Please visit [www.marvell.com](http://www.marvell.com) for a complete list of Marvell trademarks. Other names and brands may be claimed as the property of others.

Marvell\_ALASKA® 88E1512P/14P Low Latency PHY\_PB Revised: 01/22