


# FastLinQ QL41232/QL41231HOCU

Dual-port and Single-port 25G/10G SFP28 OCP  
Intelligent Ethernet Adapters with Universal RDMA

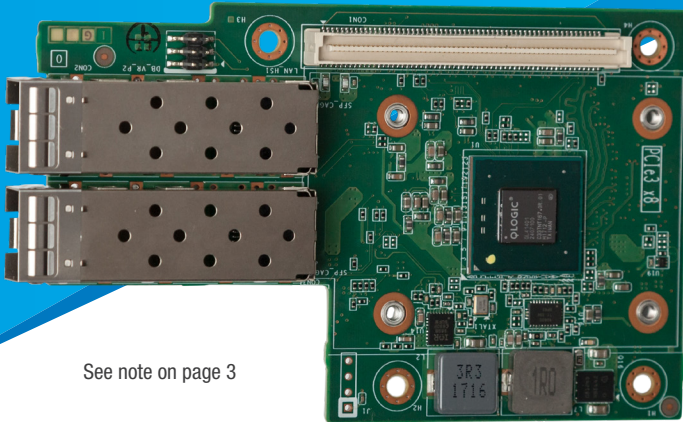

See note on page 3

- Industry's most powerful 25GbE adapter delivers the best price and performance ratio compared to 10GbE
- FastLinQ® SmartAN™ for simplified 10G/25G DAC or optical switch connectivity without user intervention
- Universal RDMA—Delivers the ultimate choice and flexibility with concurrent support for RoCE, RoCEv2, and iWARP technologies
- Secure firmware update process with private and public key encryption technology prevents hackers from altering adapter
- Increase VM density and accelerate multitenant networks with full offload for tunneling protocols

## OVERVIEW

FastLinQ offers a dual-port and a single-port 25/10GbE OCP Intelligent Ethernet Adapter with Universal RDMA offloads for Open Compute Project (OCP) servers. The QL41232 and QL41231 adapters (dual-port and single-port, respectively) leverage the Cavium™ long-standing industry leadership in Ethernet, providing the highest level of performance, efficiency, and scalability for Open Compute server and storage applications in Web 2.0, enterprise data centers, and cloud infrastructure.

For more effective use of the bandwidth, the FastLinQ Intelligent Ethernet Adapters from Cavium offer switch-independent NIC partitioning (NPAR), which enables segmentation of each 25/10GbE port into four virtual ports, with flexible allocation of bandwidth to each port. The segmentation allows IT organizations to improve resource utilization while lowering infrastructure and operational costs.

Virtualization, cloud computing, high-performance computing, convergence, and clustering initiatives are increasing workload demands. Cavium's cutting-edge server and network virtualization features—Virtual Extensible LAN (VXLAN), Network Virtualization using Generic Routing Encapsulation (NVGRE), Genetic Routing Encapsulation (GRE), and Generic Network Virtualization Encapsulation (GENEVE) tunneling offloads—deliver the most advanced 25/10GbE adapters. The FastLinQ

QL41232/QL41231HOCU Intelligent Ethernet Adapters are the solution of choice for workload-intensive computing environments, providing a reliable, high-performance 25/10GbE connectivity solution.

## FEATURES

- Dual-port 25G/10G connectivity for OCP servers
- Backward compatibility with 10GbE infrastructure for complete investment protection
- x8 PCI Express® (PCIe®) 3.0 (8GTps) support
- Accelerate the most demanding telco NFV workloads with the Cavium DPDK high-speed packet processing engine
- Orchestrate and manage hyperscale OpenStack® deployments with Cavium cloud-enabled management framework
- Universal Remote Direct Memory Access (RDMA) technologies—RDMA over Converged Ethernet (RoCE), RoCEv2, and Internet Wide Area RDMA Protocol (iWARP)
- VXLAN, NVGRE, GRE, and GENEVE tunneling offloads
- Network boot support:
  - iSCSI remote boot
  - Pre-execution environment (PXE) 2.0

**FEATURES** *(continued)*

- MSI and MSI-X support
- IPv4 and IPv6 offloads
- PCI-SIG® single root I/O virtualization (SR-IOV) support
- Comprehensive stateless offloads
- Receive side scaling (RSS)
- Transmit side scaling (TSS)
- Jumbo frame support up to 9,600 bytes
- Network teaming, failover, and load balancing:
  - Switch-independent teaming modes
  - Switch-dependent teaming modes—Link Aggregation Control Protocol (LACP) and generic trunking
- Data center bridging (DCB)

**ACCELERATE ANY NETWORK WITH UNIVERSAL RDMA OFFLOAD**

The Cavium QL41232/QL41231HOCU 25/10GbE Adapters support RoCE and iWARP acceleration to deliver low latency, low CPU utilization, and high performance on Windows Server® Message Block (SMB) Direct 3.0 and 3.02. QL41232/QL41231HOCU 25/10GbE Adapters have the unique capability to deliver Universal RDMA that enables RoCE, RoCEv2, and iWARP. Cavium Universal RDMA and emerging low-latency I/O bus mechanisms such as Network File System over RDMA (NFSoverRDMA), and NVMe Express® (NVMe™) over Fabric (NVMe-oF) allow customers to accelerate access to data. Cavium's cutting-edge offloading technology increases cluster efficiency and scalability to many thousands of nodes.

**HIGH-DENSITY SERVER VIRTUALIZATION**

The latest hypervisors and multicore systems use several technologies to increase the scale of virtualization. The Cavium QL41232/QL41231HOCU 25/10GbE Adapters support:

- VMware® NetQueue
- Windows® Hyper-V® Virtual Machine Queue (VMQ)
- Linux® Multiqueue
- Windows, Linux, and VMware switch-independent NPAR
- Windows Hyper-V, Linux Kernel-based Virtual Machine (KVM), and VMware ESXi™ SR-IOV

These features provide ultimate flexibility, quality of service (QoS), and optimized host and virtual machine (VM) performance while providing full 25Gbps bandwidth per port. Public and private cloud-virtualized server farms can now achieve 2.5 times the VM density for the best price and VM ratio.

**WIRE-SPEED NETWORK VIRTUALIZATION**

Enterprise-class data centers can be scaled using overlay networks to carry VM traffic over a logical tunnel using NVGRE, VXLAN, and GENEVE. Although overlay networks can resolve virtual local area network (VLAN) limitations, native stateless offloading engines are bypassed, which places a higher load on the system's CPU. The Cavium QL41232/QL41231HOCU 25/10GbE Adapters efficiently handle this load with advanced NVGRE, VXLAN, and GENEVE stateless offload engines that access the overlay protocol headers. This access enables traditional stateless offloads of encapsulated traffic with native-level performance in the network. Additionally, Cavium QL41232/QL41231HOCU 25GbE Adapters support VMware NSX® and Open vSwitch (OVS).

**HYPER-SCALE ORCHESTRATION WITH OPENSTACK**

The Cavium QL41232/QL41231HOCU 25/10GbE Adapters support the OpenStack open source infrastructure for constructing and supervising public, private, and hybrid cloud computing platforms. These platforms allow providers to rapidly and horizontally scale VMs over their entire, diverse, and widely spread network architecture to meet the real-time needs of their customers. Cavium's integrated, multiprotocol management utility, QConvergeConsole® (QCC), provides breakthrough features that allow customers to visualize the OpenStack-orchestrated data center using auto-discovery technology.

**ACCELERATE TELCO NETWORK FUNCTION VIRTUALIZATION (NFV) WORKLOADS**

In addition to OpenStack, Cavium QL41232/QL41231HOCU 25/10GbE Adapters support NFV that allows decoupling of network functions and services from dedicated hardware (such as routers, firewalls, and load balancers) into hosted VMs. NFV enables network administrators to flexibly create network functions and services as they need them, reducing capital expenditure and operating expenses, and enhancing business and network services agility. Cavium's 25GbE technology is integrated into the Data Plane Development Kit (DPDK) and can deliver up to 36 million packets per second to host the most demanding NFV workloads.

**TRUSTED, SECURE, RELIABLE, AND INTEROPERABLE**

Cavium is an industry leader in 25GbE and was the first to demonstrate end-to-end interoperability for 25Gb and 100Gb Ethernet solutions. QL41232/QL41231HOCU 25/10GbE Adapters adhere to standards that ensure interoperability with a wide range of network solutions. In addition, Cavium's technology provides an easy upgrade path to 100GbE networks that utilize multiple 25GbE lanes.

Cavium adapters are secure by design. Through public and private key encryption technology, the adapter enforces a process for secure firmware updates that prevents hackers from altering the code running on the adapter.

## Host Bus Interface Specifications

### Bus Interface

- PCI Express (PCIe) Gen 3 x8, Gen 2 x8 (electrical)

### Host Interrupts

- MSI-X

### I/O Virtualization

- SR-IOV (up to 192 virtual functions)
- NPAR (up to 16 physical functions)

### Compliance

- *PCI Express Base Specification*, rev. 3.1
- *PCI Express Card Electromechanical Specification*, rev. 3.0
- *PCI Bus Power Management Interface Specification*, rev. 1.2

## Ethernet Specifications

### Throughput

- 25Gbps line rate per-port in 25GbE mode
- 10Gbps line rate per-port in 10GbE mode

### Ethernet Frame

- Standard MTU sizes and jumbo frames up to 9,600 bytes

### Stateless Offload

- IP, TCP, and User Datagram Protocol (UDP) checksum offloads
- TCP segmentation offload (TSO)
- Large send offload (LSO)
- Giant send offload (GSO)
- Large receive offload (LRO) (VMware)
- Generic receive offload (GRO) (Linux)
- Receive segment coalescing (RSC) (Windows)
- RSS
- TSS
- Interrupt coalescing
- VMware NetQueue, Microsoft® Hyper-V VMQ, and Linux Multiqueue
- RDMA

### Tunneling Offloads

- VXLAN
- NVGRE
- GENEVE
- GRE

## Board Hardware Features

- Wake on LAN (WoL)
- Network Controller Sideband Interface (NC-SI)
- Pulse Width Modulation (PWM) switching voltage regulator
- Over temperature protection design compliance

## Board Firmware Features

- Secure Firmware Update process.
- Smart Auto Negotiation (FastLinQ SmartAN)
- Forward error correction (FEC) support:
  - Reed-Solomon FEC (RS-FEC)
  - Fire Code FEC (FC-FEC)

## Compliance

- IEEE Specifications:
  - 802.1AS (*Precise Synchronization*)
  - 802.1ax-2008 (*Link Aggregation*)
  - 802.1p (*Priority Encoding*)
  - 802.1q (*VLAN*)
  - 802.1Qaz (*DCBX and ETS*)
  - 802.1Qbb (*Priority-based Flow Control*)
  - 802.3-2015 (*10Gb and 25Gb Ethernet flow control*)
  - 802.3-2015 *Clause 52 (10Gb Ethernet optical)*
  - 802.3by -2016 (*25G Ethernet*)
  - 1588-2002 *PTPv1 (Precision Time Protocol)*
  - 1588-2008 *PTPv2*
- SFF8431 *Annex E (10Gb Direct Attach Copper)*
- RFQs:
  - IPv4 (*RFQ 791*)
  - IPv6 (*RFC 2460*)

## RDMA Specifications

### Universal RDMA

- RoCE
- RoCEv2
- iWARP
- Storage over RDMA: SMB Direct, Storage Spaces Direct (S2D), and NVMeoF
- NFSoRDMA

## Tools and Utilities

### Management Tools and Device Utilities

- QLogic® Control Suite integrated network adapter management utility (CLI) for Linux and Windows
- QConvergeConsole integrated network management utility (GUI) for Linux and Windows

## Management Tools and Device Utilities (*continued*)

- QConvergeConsole Plug-ins for vSphere® (GUI) and ESXCLI plug-in for VMware
- QConvergeConsole PowerKit (Windows PowerShell® cmdlets) for Linux and Windows
- Pre-boot unified extensible firmware interface (UEFI) Device Configuration pages in system BIOS
- Native OS management tools for networking

## Boot Support

- Unified extensible firmware interface (UEFI)
- PXE
- iSCSI Remote Boot

## APIs

- SNIA HBA API v2
- SMI-S

## Operating Systems

- For the latest applicable operating system information, see <http://driverdownloads.qlogic.com>

## Physical Specifications

### Ports

- Dual and single 25/10Gbps Ethernet: SFP28 cages

### Form Factor

- OCP version 2.0
- Type 1 heatsink

### Cooling Requirements

- QL41232HOCU: 220 LFM at 45°C (113°F)
- QL41231HOCU: 200 LFM at 45°C (113°F)

## Environment and Equipment Specifications

### Temperature

- Operating: 0°C to 55°C (32°F to 131°F)
- Storage: -40°C to 65°C (-40°F to 149°F)

### Humidity

- Operating: 10% to 80%
- Storage: 5% to 90%

### Compliance

- RoHS compliant

Note:  
All advertised features are enabled in the hardware. Actual feature availability is dependent on software driver releases. See the release notes.

Picture may not be representative of the final shipping product.

Connectivity

Rate	Cable and Maximum Distance (m)		
	DAC	SR FOC	AOC
10G	7	400 OM4 300 OM3	30
25G	5	100 OM4 70 OM3	30

DAC = Direct attach copper  
 SR FOC = SR fiber optic cable  
 AOC = Active optical cable

Agency Approvals—Safety

US and Canada

- UL 60950-1
- CSA C22.2

Europe

- TUV EN60950-1
- TUV IEC 60950-1
- CB Certified

Agency Approvals<sup>1</sup>—EMI and EMC (Class A)

US and Canada

- FCC Rules, CFR Title 47, Part 15, Subpart Class A
- Industry Canada, ICES-003: Class A

Europe

- EN55032
- EN55024
- EN61000-3-2
- EN61000-3-3

Japan

- VCCI: Class A

New Zealand and Australia

- AS/NZS: Class A

Korea

- KC-RRA Class A

Taiwan

- BSMI CNS 13438

<sup>1</sup> Agency approvals have not been authorized at the time of publication; this list is preliminary.

Ordering Information

QL41232HOCU-SP/BK/CK

- Dual port
  - SP=Single Pack
  - BK=Bulk Kit
  - CK=Channel Kit

QL41231HOCU-SP/BK/CK

- Single port
  - SP=Single Pack
  - BK=Bulk Kit
  - CK=Channel Kit



Follow us:

Corporate Headquarters Cavium, Inc. 2315 N. First Street San Jose, CA 95131 408-943-7100

Copyright © 2017, 2018 Cavium, Inc. All rights reserved worldwide. QLogic Corporation is a wholly owned subsidiary of Cavium, Inc. Cavium, the Cavium logo, FastLinQ, QConvergeConsole, QLogic, and SmartAN are registered trademarks or trademarks of Cavium, Inc. All other brand and product names are registered trademarks or trademarks of their respective owners.

This document is provided for informational purposes only and may contain errors. Cavium reserves the right, without notice, to make changes to this document or in product design or specifications. Cavium disclaims any warranty of any kind, expressed or implied, and does not guarantee that any results or performance described in the document will be achieved by you. All statements regarding Cavium's future direction and intent are subject to change or withdrawal without notice and represent goals and objectives only.