



Marvell[®] Fibre Channel and Converged Network Adapters for VMware[®] 7.0 and 8.0

2600, 2700, and 2800 Series Marvell QLogic[®] Fibre Channel Adapters
41000 and 45000 Series Marvell Converged Network Adapters

User's Guide

THIS DOCUMENT AND THE INFORMATION FURNISHED IN THIS DOCUMENT ARE PROVIDED "AS IS" WITHOUT ANY WARRANTY. MARVELL AND ITS AFFILIATES EXPRESSLY DISCLAIM AND MAKE NO WARRANTIES OR GUARANTEES, WHETHER EXPRESS, ORAL, IMPLIED, STATUTORY, ARISING BY OPERATION OF LAW, OR AS A RESULT OF USAGE OF TRADE, COURSE OF DEALING, OR COURSE OF PERFORMANCE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.

This document, including any software or firmware referenced in this document, is owned by Marvell or Marvell's licensors, and is protected by intellectual property laws. No license, express or implied, to any Marvell intellectual property rights is granted by this document. The information furnished in this document is provided for reference purposes only for use with Marvell products. It is the user's own responsibility to design or build products with this information. Marvell products are not authorized for use as critical components in medical devices, military systems, life or critical support devices, or related systems. Marvell is not liable, in whole or in part, and the user will indemnify and hold Marvell harmless for any claim, damage, or other liability related to any such use of Marvell products.

Marvell assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning the Marvell products disclosed herein. Marvell and the Marvell logo are registered trademarks of Marvell or its affiliates. Please visit www.marvell.com for a complete list of Marvell trademarks and guidelines for use of such trademarks. Other names and brands may be claimed as the property of others.

Copyright

Copyright © 2024. Marvell and/or its affiliates. All rights reserved.

Table of Contents

Preface

Supported Products	vii
Supported Operating Systems	viii
Intended Audience	viii
What Is In This Guide	viii
Related Materials	ix
Documentation Conventions	x
Technical Support	xiii
Downloading Updates and Documentation	xiii

1

Installation

Supported Features	1
Installing the Hardware	2
Downloading the Latest Driver	2
Installing Management Tools	3
Installing the QConvergeConsole ESXi Client Plug-in	4

2

Configuring Fibre Channel Adapters 2600, 2700, 2800

Identifying Marvell Adapters on VMware ESXi 7.0 and 8.0	6
Identifying Marvell Adapters Using the QConvergeConsole ESXi Client Plug-in	6
Identifying Marvell Adapters Using the ESXi Shell	7
Installing the Asynchronous Fibre Channel Driver	10
Initial Driver Installation	10
Subsequent Driver Installation	11
Verifying that the Driver Is Installed and Loaded	12
Configuring the Driver Parameters	12
Configuring Driver Parameters Using the QConvergeConsole vSphere Client Plug-in	12
Configuring Driver Parameters Using ESXCLI	13
Dynamic Enable and Disable Driver Functionalities	20
Deploying NPIV for VMware ESXi 7.0 and 8.0	21
Monitoring NPIV Virtual Ports from Management Tools	22
Deploying VMID for VMware ESXi 7.0 and 8.0	24

	Enabling USCM FPIN-LI/MPIO	24
	Configuring Boot from SAN	24
	Support for FC-NVMe.	27
	Support for Universal SAN Congestion Mitigation (USCM)	27
3	Configuring 41000/45000 Converged Network Adapters	
	Software Components	29
	Driver Installation and Verification	29
	iSCSI Driver qedi	30
	Module Parameters for qedi	30
	Configuring the qedi Driver	31
	Verifying iSCSI Driver Presence	31
	Target Configuration	33
	Static Target Configuration	33
	Dynamic Target Configuration	35
	Differences from bnx2i.	37
	Differences from bnx2fc.	37
	FCoE Driver qedf	37
	Module Parameters for qedf	37
	Verifying FCoE Driver Presence	39
	FCoE Switch and Storage Configuration.	40
	Configuring Boot from SAN	41
A	Troubleshooting	
	Troubleshooting with LEDs.	46
	Dynamic Extended Logging	46
	Troubleshooting with Driver Logs.	48
	Debugging Using vmkmgmt_keyval Information	51
	Collecting System Logs for Troubleshooting	52
	Frequently Seen Issues	52
B	Revision History	
	Glossary	

List of Figures

Figure		Page
2-1	vmkmgmt_keyval Output	7
2-2	Installing the Asynchronous Driver.	11
2-3	Removing the Asynchronous Driver.	11
2-4	NPIV Example	21
2-5	NPIV in vCenter Server Plug-in	23
2-6	Virtual Port Information in vCenter Server Plug-in	23
2-7	Starting Fast!UTIL from the BIOS Screen	25
3-1	Driver Installation Package Command.	29
3-2	Storage Adapters	32
3-3	Network Port Binding Page	33
3-4	Add Static Target Server	34
3-5	Static Configuration Added.	35
3-6	Add Send Target Server.	36
3-7	Dynamic Target Configuration Added.	36
3-8	VC Client: Storage Adapter Page.	40
3-9	Starting Fast!UTIL from the BIOS Screen	43
A-1	Snapshot of Driver Log: ESXi 7.0 and 8.0	48

List of Tables

Table		Page
2-1	Configurable Driver Parameters on VMware ESXi 7.0 and 8.0	14
2-2	Dynamic Configurable Parameters: ESXi 7.0 and 8.0	20
2-3	Dynamic Configurable Parameters for Each Adapter: ESXi 7.0 and 8.0	21
A-1	Common Driver Log Messages: ESXi 7.0 and 8.0.	49
A-2	Output Fields for vmkmgmt_keyval	51
A-3	Frequently Seen Issues	52

Preface

This guide provides detailed instructions on the configuration and troubleshooting of Marvell® QLogic® Fibre Channel Adapters and Marvell FastLinQ® Converged Network Adapters on VMware® ESXi 7.0 and 8.0. It also provides details on the use of Marvell adapter features to enhance the value of server virtualization using VMware ESXi 7.0 and 8.0. Such features include virtual adapter configuration using N_Port ID virtualization (NPIV) and “boot from SAN” configuration along with Fibre Channel-Non-volatile Memory Express (FC-NVMe®) for lower latency storage connections.

Supported Products

Marvell provides a portfolio of Fibre Channel and Converged Network Adapters that can be used on the VMware ESXi 7.0 and 8.0 platforms:

- Marvell QLogic Fibre Channel Adapters
 - ❑ 2670 Series 16GFC Adapters in PCI Express and PCI Express Gen3 ExpressModule form factors (ESXi 7.0 only)
 - ❑ 2690 Series Enhanced 16GFC Adapters in PCI Express Gen3 form factor
 - ❑ 2740/2760 Series 32GFC Adapters in PCI Express Gen3 form factor
 - ❑ 2770 Series Enhanced 32GFC Adapters in PCI Express Gen4 form factor
 - ❑ 2870 Series 64GFC Adapters in PCI Express Gen4 form factor
- Marvell FastLinQ Converged Network Adapters
 - ❑ 41000 Series Adapters in PCI Express Gen3 form factors is covered in its respective user's guide.
 - ❑ 45000 Series Adapters in PCI Express Gen3 form factors is covered in its respective user's guide.

Supported Operating Systems

- For 2600, 2700, and 2800 Series Marvell QLogic® Fibre Channel Adapters:
 - ESXi 7.0 U3, ESXi 8.0, ESXi 8.0 U1, ESXi 8.0 U2, ESXi 8.0 U3
- For 41000 and 45000 Series Marvell FastLinQ Converged Network Adapters:
 - ESXi 7.0U3, ESXi 8.0 U3

Intended Audience

This guide is intended for users deploying Marvell Fibre Channel and Converged Network Adapters on VMware ESXi 7.0 and 8.0. These users range from end users, such as data center managers and system administrators, to the test and development community.

What Is In This Guide

This user's guide provides a brief introduction to the Fibre Channel and Converged Network Adapter products from Marvell. The primary focus of this guide is to explain the adapter driver features and management tools available on VMware ESXi 7.0 and 8.0, and the supported features.

NOTE

For Converged Network Adapters, this guide covers only the Fibre Channel over Ethernet (FCoE) functionality. To download FCoE drivers, see the instructions in [“Downloading Updates and Documentation” on page xiii](#).

This preface covers the intended audience, related materials, document conventions used, license agreements, and technical support. The remainder of the guide is organized into the following chapters and appendices:

- [Chapter 1 Installation](#) details the supported features and covers installation of hardware, drivers, and management tools.
- [Chapter 2 Configuring Fibre Channel Adapters 2600, 2700, 2800](#) covers how to identify Marvell adapters, start *Fast!UTIL*, verify that the driver is loaded, configure driver parameters (including VMID), deploy N_Port ID virtualization (NPIV), monitor NPIV from the management tools, and configure the boot from SAN functionality.

- [Chapter 3 Configuring 41000/45000 Converged Network Adapters](#) provides information about driver storage, including:
 - 41000/45000
 - qedi (native)
 - qedf (native)
- [Appendix A Troubleshooting](#) details troubleshooting methods, including LEDs and logs.
- [Appendix B Revision History](#) contains a list of changes made to this guide since the last revision.

At the end of this user's guide are a glossary of terms to help you quickly find information.

Related Materials

For information about downloading documentation from the Marvell Web site, see ["Downloading Updates and Documentation" on page xiii](#)):

- Marvell adapters:
 - *User's Guide: Fibre Channel Adapter (2600 Series)*, part number FC0054609-00
 - *User's Guide: Fibre Channel Adapter (2700 Series)*, part number 83270-546-00
 - *User's Guide: Fibre Channel Adapter (2800 Series)*, part number MA2854601-00
 - *User's Guide: Converged Network Adapters and Intelligent Ethernet Adapters (FastLinQ 41000 Series)*, part number AH0054601-00
 - *User's Guide: Converged Network Adapters and Intelligent Ethernet Adapters (FastLinQ 45000 Series)*, part number BC0154501-00
- Management tools for Marvell adapters on VMware ESXi:
 - *User's Guide: Marvell ESXCLI Plug-in for VMware vSphere (3400, 41000, 45000 Series Adapters)*, part number BC0151101-00
 - *User's Guide: Marvell FastLinQ PowerKit (Windows PowerShell cmdlets for 3400, 8400, 41000, 45000 Adapters)*, part number BC0054518-00
- For information about using Marvell Fibre Channel (MRVLFC) PowerKit with Linux, VMware, and Windows, see the following document:
 - *User's Guide: Marvell QLogic PowerKit for 2600, 2700, 2800 Series Fibre Channel Adapters*, part number TD-001187

- For information about using Marvell QLogic FC QConvergeConsole Extension for Windows Admin Center, see the following document:
 - ❑ *User's Guide: Marvell QLogic Fibre Channel QConvergeConsole Extension for Windows Admin Center*, part number TD-001728
- For information about using QConvergeConsole vSphere Client Plug-in, see the following document:
 - ❑ *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere (2600, 2700, 2800, 3400, 8300, 8400, 41000, 45000 Series Adapters)*, part number SN0054677-00

The following document provides additional relevant information on VMware ESXi and can be downloaded from the VMware Web site:

- *vSphere Storage Guide*—Describes storage options available to VMware ESXi 8.0 and ESXi 7.0:

<https://docs.vmware.com/en/VMware-vSphere/index.html>

Documentation Conventions

This guide uses the following documentation conventions:

- **NOTE** provides additional information.
- Text in **blue** font indicates a hyperlink (jump) to a figure, table, or section in this guide, and links to Web sites are shown in underlined blue. For example:
 - ❑ **Table 9-2** lists problems related to the user interface and remote agent.
 - ❑ See **"Installation Checklist"** on page 6.
 - ❑ For more information, visit www.marvell.com.
- Text in **bold** font indicates user interface elements such as a menu items, buttons, check boxes, or column headings. For example:
 - ❑ Click the **Start** button, point to **Programs**, point to **Accessories**, and then click **Command Prompt**.
 - ❑ Under **Notification Options**, select the **Warning Alarms** check box.
- Text in `Courier` font indicates a file name, directory path, or screen output. For example:
 - ❑ To return to the root directory from anywhere in the file structure, type `cd /root`, and then press the ENTER key.

Text in **Courier bold** font indicates a command. For example:

- ❑ Issue the following command: **sh ./install.bin**

- Key names and key strokes are indicated with UPPERCASE:
 - Press CTRL+P.
 - Press the UP ARROW key.
- Text in *italics* indicates terms, emphasis, variables, or document titles. For example:
 - For a complete listing of license agreements, refer to the applicable *Software End User License Agreement*.
 - What are *shortcut keys*?
 - To enter the date type *mm/dd/yyyy* (where *mm* is the month, *dd* is the day, and *yyyy* is the year).
- Topic titles between quotation marks identify related topics either within this manual or in the online help, which is also referred to as *the help system* throughout this document.
- Command line interface (CLI) command syntax conventions include the following:
 - Plain text indicates items that you must type as shown. For example:
 - `qauccli -pr nic -ei`
 - `< >` (angle brackets) indicate a variable whose value you must specify. For example:
 - `<serial_number>`

NOTE

For CLI commands only, variable names are always indicated using angle brackets instead of *italics*.

- `[]` (square brackets) indicate an optional parameter. For example:
 - `[<file_name>]` means specify a file name, or omit it to select the default file name.
- `|` (vertical bar) indicates mutually exclusive options; select one option only. For example:
 - `on|off`
 - `1|2|3|4`

- ❑ . . . (ellipsis) indicates that the preceding item may be repeated. For example:
 - $x \dots$ means *one* or more instances of x .
 - $[x \dots]$ means *zero* or more instances of x .
- ❑ $()$ (parentheses) and $\{ \}$ (braces) are used to avoid logical ambiguity. For example:
 - $a|b\ c$ is ambiguous
 - $\{ (a|b)\ c \}$ means a or b , followed by c
 - $\{ a|(b\ c) \}$ means either a , or $b\ c$

Technical Support

Customers should contact their authorized maintenance provider for technical support of their Marvell QLogic and FastLinQ products.

Downloading Updates and Documentation

To download firmware, software, and documentation:

1. Go to www.marvell.com.
2. Click **Support**, and then under **Tools & Resources**, click **Driver Downloads**.
3. In the Marvell Drivers window:
 - a. (MUST) Under CATEGORY, select either FIBRE CHANNEL ADAPTERS or CONVERGED NETWORK ADAPTERS.
 - b. (optional) Under PLATFORM/OS, select the platform/OS that matches your system.
 - c. (optional) Under PART NUMBER, select the part number for your adapter.
 - d. (optional) Under KEYWORDS, type a keyword describing what you are looking for.
4. Click **Apply**.

5. Locate the firmware (boot code), software (drivers, management tools), or document (documentation for user's guides) you need, and then do one of the following:
 - a. Click the [blue](#) text in the DESCRIPTION column.
 - b. Click the arrow in the DOWNLOAD column.

NOTE

Marvell recommends downloading the associated Read Me and Release Notes for more information. To find them, enter either **Read Me** or **Release Notes** in the KEYWORDS search box.

A message may appear asking you to review and accept the Marvell Limited Use License Agreement.

6. If applicable, read the agreement, select the check box, and then click **I ACCEPT** to accept the end license agreement and start the download.

1 Installation

This chapter provides the following installation information:

- [Supported Features](#)
- [“Installing the Hardware” on page 2](#)
- [“Downloading the Latest Driver” on page 2](#)
- [“Installing Management Tools” on page 3](#)

Supported Features

When properly installed in a VMware ESXi 7.0 and 8.0 environment, Marvell QLogic 16Gb, 32Gb, 64Gb Fibre Channel Adapters and Marvell FastLinQ 10/25/40/50/100Gigabit Ethernet (GbE) Converged Network Adapters support the following features:

- **Topologies** include FC-AL, FC-AL2, point-to-point, and switched fabric.
- **Protocols** include FCP-3-SCS, FC-tape (FCP-2), and FC-NVMe.
- **Link Rates** include 16Gb, 32Gb, and 64Gb for Fibre Channel Adapters, and 10/25/40/50/100Gb Enhanced Ethernet for Converged Network Adapters with auto-rate negotiation and support for MSI-X.
- **Single driver support** for
 - ☐ All Marvell QLogic Fibre Channel family of adapters
 - ☐ All Marvell FastLinQ 41000/45000 family of adapters
- **SNIA Common Adapter API** v1.x and v2.0 compliant.
- **Marvell CIM Providers for Adapter Management** for ESXi 7.0.
- **DSDK based ESXCLI plugin and Powerkit provider** support on ESXi8.0 and later versions
- **N_Port ID virtualization (NPIV)** inbox driver supports 255 virtual adapters per port.
- **Boot from SAN support** enables servers on a network to boot their operating system from a Fibre Channel redundant array of independent/inexpensive disks (RAID) unit on the SAN.

- **Support for MSI-X** on 16Gb, 32Gb, and 64Gb Fibre Channel and 10/25/40/50/100GbE Converged Network Adapters.
- **Support for VMware SCSI path failover** for Active/Active and Active/Passive storage devices.
- **Support for VMware NVMe path failover** for Active/Active storage devices.
- **Support for VMware VMotion® and VMware Storage VMotion**, which enables live migration of running VMs from one physical server to another with zero downtime, continuous service availability, and complete transaction integrity.
- **Remote SAN and adapter management** uses the QConvergeConsole management tool plug-ins for VMware ESXi: the QConvergeConsole vSphere Client Plug-in (for information on installing these plug-ins, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*).
- **Support for virtual machine identifier (VMID)** tags I/O frames so they can be associated with the virtual machine that issued each I/O for reporting or traffic management purposes as they traverse the SAN fabric.

Installing the Hardware

For detailed information on installing a Marvell Fibre Channel or Converged Network Adapter on a host, refer to the appropriate user's guide for that adapter (see "[Related Materials](#)" on page ix). For instructions on downloading documentation from the Marvell Web site, see "[Downloading Updates and Documentation](#)" on page xiii.

Downloading the Latest Driver

The Marvell QLogic driver for Fibre Channel ships "inbox" with VMware ESXi 7.0 and 8.0. However, in some specific cases, you *may* need to download the following from the VMware Website:

- An *out-of-box* driver CD
- VMware ESXi patches that might include specific fixes for adapters

Fibre Channel over Ethernet (FCoE) *requires* that you download the latest driver from the VMware Website:

<https://my.vmware.com/web/vmware/downloads>

Installing Management Tools

The management tools for Marvell 16Gb, 32Gb, and 64Gb Fibre Channel and 10/25/40/50/100GbE Converged Network Adapters on VMware ESXi platforms include the Marvell Adapter CIM providers, the QConvergeConsole plug-ins for VMware (the VMware vCenter Server Plug-in), and the Marvell QLogic Fibre Channel PowerKit.

For detailed information on installing the management tool plug-ins, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*. For instructions on downloading documentation from the Marvell Web site, see [“Downloading Updates and Documentation” on page xiii](#).

- **Marvell Fibre Channel and Converged Network Adapter CIM Provider** provides the back end for the adapter management capabilities of the QConvergeConsole vSphere Client Plug-in.
- **QConvergeConsole ESXi Client Plug-in** provides the following management capabilities:
 - ❑ Management for Fibre Channel and Converged Network Adapters
 - ❑ Storage and network maps that provide an end-to-end view of the Marvell adapter connections to the software and hardware components in the VMware ESX and ESXi environments
 - ❑ Downloading and updating the adapter boot code and firmware for all supported Marvell adapters
 - ❑ Querying and modifying driver parameters for all supported protocols.
 - ❑ Viewing and managing initiators, targets, and LUNs for Fibre Channel and FCoE ports
 - ❑ Querying statistics, running diagnostics, and obtaining transceiver information

For more information, see the *Marvell QLogic QConvergeConsole Plug-ins for vSphere User's Guide*, part number SN0054677-00.

- **VMware Fibre Channel ESXCLI Plug-in** provides the following management capabilities:
 - ❑ Management for Fibre Channel and FCoE Adapters
 - ❑ Updating the boot code and firmware for all supported Marvell adapters
 - ❑ Viewing targets and LUNs for Fibre Channel and FCoE ports
 - ❑ Querying statistics, running diagnostics, and obtaining transceiver information

For more information, see the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*

- **Marvell QLogic Fibre Channel PowerKit (MRVLFC)** provides custom PowerShell cmdlets to monitor and manage your Marvell QLogic Fibre Channel Adapters through the Windows PowerShell® interface.

For more information, see the *Marvell QLogic PowerKit User's Guide*, part number TD-001187.

Installing the QConvergeConsole ESXi Client Plug-in

For information on installing the QConvergeConsole ESXi Client Plug-in, refer to the *Marvell QLogic QConvergeConsole Plug-ins for vSphere User's Guide*. For information on downloading documentation from the Marvell Web site, see [“Downloading Updates and Documentation” on page xiii](#).

2

Configuring Fibre Channel Adapters 2600, 2700, 2800

Marvell QLogic Fibre Channel Adapters on VMware ESXi 7.0 and 8.0 configuration procedures include the following:

- [“Identifying Marvell Adapters on VMware ESXi 7.0 and 8.0” on page 6](#)
- [“Verifying that the Driver Is Installed and Loaded” on page 12](#)
- [“Configuring the Driver Parameters” on page 12](#)
- [“Deploying NPIV for VMware ESXi 7.0 and 8.0” on page 21](#)
- [“Monitoring NPIV Virtual Ports from Management Tools” on page 22](#)
- [“Deploying VMID for VMware ESXi 7.0 and 8.0” on page 24](#)
- [“Configuring Boot from SAN” on page 24](#)
- [“Installing the Asynchronous Fibre Channel Driver” on page 10](#)
- [“Enabling USCM FPIN-LI/MPIO” on page 24](#)

Identifying Marvell Adapters on VMware ESXi 7.0 and 8.0

On VMware ESXi 7.0 and 8.0, you can identify Marvell Fibre Channel and Converged Network Adapters in the following ways:

- [Identifying Marvell Adapters Using the QConvergeConsole ESXi Client Plug-in](#)
- [Identifying Marvell Adapters Using the ESXi Shell](#)

Identifying Marvell Adapters Using the QConvergeConsole ESXi Client Plug-in

You can use the VMware vSphere Client Plug-in to identify Marvell Fibre Channel and Converged Network Adapters on VMware ESXi 7.0 systems.

The procedure in this section applies only to Marvell adapters that use the qlnativefc driver. It does not apply to the 41000/45000 Series Adapters.

NOTE

For detailed information on the Plug-in, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*.

To identify Marvell Fibre Channel and Converged Network Adapters using the ESXi QConvergeConsole vSphere Client Plug-in:

1. Open a Web browser and navigate to the vSphere QConvergeConsole vSphere Client Plug-in
2. Enter the credentials for the vSphere UI Server to log in.
1. In the VMware vSphere QConvergeConsole vSphere Client Plug-in, click **vCenter** in the left navigation pane.
2. On the vCenter Home page, click **Hosts** in the left navigation pane to view a list of the hosts that are connected to this vCenter Server.

If no hosts are connected to the vCenter Server, connect a host to the vCenter Server by following the instructions provided by VMware.

3. In the provided host list, click one of the hosts.
4. Click the **Configure** tab.
5. In the system tree on the left, click the **QConvergeConsole** link.

The QConvergeConsole page lists the Marvell adapters on the selected host.

Identifying Marvell Adapters Using the ESXi Shell

You can use the ESXi shell to identify Marvell Fibre Channel and Converged Network Adapters on VMware ESXi 7.0 and 8.0 systems.

To identify Marvell FC adapters and CNAs using the VMware ESXi 7.0 and 8.0 shell:

1. Discover the device using `lspci`:

```
# lspci | grep QLogic
```

Following is a sample output:

```
0000:43:00.0 Serial bus controller: QLogic Corp QLE2742 Dual Port 32Gb Fibre Channel to PCIe Adapter [vmhba4]
```

```
0000:43:00.1 Serial bus controller: QLogic Corp QLE2742 Dual Port 32Gb Fibre Channel to PCIe Adapter [vmhba5]
```

2. To list all the keys for a specific instance, issue the following command:

```
/usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<X>/qlogic -l
```

Where `vmhba<X>` indicates the name of the storage adapter. The name refers to the physical adapter on the host, not to the SCSI controller used by the virtual machines.

For example:

```
/usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba67/qlogic -l
```

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba65/qlogic -l
Listing keys:
Name: ADAPTER
Type: string
Value:
QLogic PCI-Express Dual Channel 16Gb Fibre Channel HBA for QLE8362:
FC Firmware Version: 6.06.03 (d0d5), Driver version 1.1.29.0

Host Device Name vmhba65

BIOS version 3.19
FCODE version 4.04
EFI version 5.39
Flash FW version 6.06.03
ISP: ISP2031, Serial# AFF1141F01200
MSI-X enabled
Request Queue = 0x4102da035000, Response Queue = 0x4102da056000
Request Queue count = 2048, Response Queue count = 512
Number of response queues for CPU affinity operation: 4

Name: NPIV
Type: string
Value:
Driver version 1.1.29.0

Host Device Name vmhba65
```

Figure 2-1. vmkmgmt_keyval Output

1. To view adapter details for the corresponding vmhba, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<x>/qlogic -k ADAPTER -g
```

For example:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba65/qlogic -k ADAPTER -g  
Key 'ADAPTER':
```

```
QLogic PCI-Express Dual Channel 16Gb Fibre Channel HBA for QLE8362:
```

```
FC Firmware Version: 6.06.03 (d0d5), Driver version 1.1.29.0
```

```
Host Device Name vmhba65
```

```
BIOS version 3.19
```

```
FCODE version 4.04
```

```
EFI version 5.39
```

```
Flash FW version 6.06.03
```

```
ISP: ISP2031, Serial# AFF1141F01200
```

```
MSI-X enabled
```

```
Request Queue = 0x4102da035000, Response Queue = 0x4102da056000
```

2. To view VMID details for the corresponding vmhba, issue the following command. The information dump includes whether VMID (application header and priority tagging) is supported on the adapter port, the number of VMIDs registered, and additional VMID information.

```
$ /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhbaN/qlogic -k ADAPTER -g
```

The following example output shows the Application Identifier information with five VMs running:

```
Application Header (VMID) supported
```

```
Number of VMIDs registered = 5
```

```
Application Tag 0x209: UUID 50 0d ea e6 e0 83 63 1a-73 2e 70 6d 92 b6 f0 76
```

```
Time since last I/O (in ms): 0
```

```
Application Tag 0x10: UUID 50 0d a1 ff 73 fe 6d e9-6a 5d 85 18 f9 87 c3 03
```

```
Time since last I/O (in ms): 0
```

```
Application Tag 0x20a: UUID 50 0d ab 33 f7 5f 39 a2-07 ab 5c fe 07 3d 01 ef
```

```
Time since last I/O (in ms): 0
```

```
Application Tag 0x11: UUID 50 0d f8 1e e3 98 37 2c-fa 49 99 2d 64 07 79 4c
```

```
Time since last I/O (in ms): 0
```

```
Application Tag 0x20b: UUID 50 0d 15 bc 72 a5 b1 25-30 50 3c 93 00 52 de 82
```

```
Time since last I/O (in ms): 0
```

3. To view target details for the corresponding vmhba, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<x>/qlogic -k TARGET -g
```

For example:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba65/qlogic -k TARGET -g
Key 'TARGET':
Driver version 1.1.29.0

Host Device Name vmhba65

FC Target-Port List:
scsi-qla1-target-0=5006016141e0f364:010300:2:Online;
```

4. To view NPIV port details for the corresponding vmhba, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<x>/qlogic -k NPIV -g
```

For example:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba65/qlogic -k NPIV -g
Key 'NPIV':
Driver version 1.1.29.0

Host Device Name vmhba65

NPIV Supported : Yes
Number of Virtual Ports in Use = 4

Virtual Port Information:
Device Name for Virtual Port 1:    vmhba69
Device Name for Virtual Port 2:    vmhba68
Device Name for Virtual Port 3:    vmhba70
Device Name for Virtual Port 4:    vmhba71
```

The commands in the previous steps list the driver's supported features and its current state, in addition to its firmware, driver, and boot code versions.

vmkmgmt_keyval includes the following:

- ☐ Name shows the key value (keyval) number for corresponding adapter.
- ☐ Host adapter: loop state specifies the current state of the adapter port, including:
 - DOWN—Before 30 seconds when no connection to a fabric or target.
 - UP—Driver is updating its target database because of a change in the fabric.

- `READY`—Driver is ready to handle I/O commands.
- `DEAD`—No connection to a fabric or target.
- `UNKNOWN`—When Loop state is not specified.
- `ZIO mode` is a non-zero value that indicates that the driver is operating in the Interrupt Coalescing mode (zero interrupt operation), reducing the load on the CPU.
- `NPIV Supported` indicates whether the adapter port supports NPIV. If Yes, the maximum quantity of supported virtual ports on that specific adapter port is shown in the next line, Max Virtual Ports.
- `SCSI Device Information` lists the adapter's world wide names (WWNs) and FC IDs.
- `FC Target-Port List` lists the target devices currently attached to the adapter port.
- `Non-Target FC Port Information` lists all the devices that were connected to this port since power on. This field is used for debug purposes only, and may contain some redundant information.
- `Virtual Port Information` lists (if virtual ports were created on that specific adapter port) the virtual port's world wide names (WWNs) and state of corresponding virtual port.
- `FC Port Information for Virtual Port 1` lists the virtual target devices currently attached to the virtual adapter port.

Installing the Asynchronous Fibre Channel Driver

Follow the instructions in this section to install or reinstall the asynchronous Fibre Channel driver. This section applies to 2600/2700/2800 Series Fibre Channel Adapters (does *not* apply to 41000/45000 Series Adapters).

Initial Driver Installation

- To install the driver, issue the appropriate command:

```
# esxcli software vib install -n qlnativefc -d  
/<directory of offline-bundle>
```

or

```
esxcli software vib install -v /<path>/async-driver.vib
```

or

```
esxcli software component apply -n /<path>/  
driver-component.zip
```


For example:

```
# esxcli software vib install -v  
/vmfs/volumes/storage2/qlnativefc-1.1.3.0-1OEM.550.0.0.114902  
4.x86_64.vib
```

```
~ # esxcli software vib install -v /vmfs/volumes/storage2/qlnativefc-1.1.3.0-1OEM.550.0.0.1149024.x86_64.vib  
Installation Result  
Message: The update completed successfully, but the system needs to be rebooted for the changes to be effective  
Reboot Required: true  
VIBs Installed: QLogic_bootbank_qlnativefc_1.1.3.0-1OEM.550.0.0.1149024  
VIBs Removed:  
VIBs Skipped:
```

Figure 2-2. Installing the Asynchronous Driver

Subsequent Driver Installation

1. Find the vSphere Installation Bundle (VIB) you are updating by issuing the following command:

```
# esxcli software vib list | grep qlnativefc  
qlnativefc 1.1.2.0-1OEM.550.0.0.1096149 QLogic  
VMwareCertified 2013-05-21
```

2. Remove the old VIB by issuing the following command:

```
# esxcli software vib remove -f -n qlnativefc
```

```
~ # esxcli software vib remove -f -n qlnativefc  
Removal Result  
Message: The update completed successfully, but the system needs to be rebooted for the changes to be effective  
Reboot Required: true  
VIBs Installed:  
VIBs Removed: QLogic_bootbank_qlnativefc_1.1.3.0-1OEM.550.0.0.1149024  
VIBs Skipped:
```

Figure 2-3. Removing the Asynchronous Driver

3. Install the new driver, following the steps in [“Initial Driver Installation” on page 10](#).

Verifying that the Driver Is Installed and Loaded

Follow these steps to ensure that the Marvell Fibre Channel or Converged Network Adapter driver is installed and loaded on VMware ESXi 7.0 and 8.0 systems.

To verify that the Marvell Fibre Channel or Converged Network Adapter driver is installed and loaded:

1. Log in to the service console as *root* user.

NOTE

To log in to the service console, use an SSH (secure shell) client to connect to the ESXi host. Ensure that SSH access is enabled on the ESXi host by following the instructions from VMware.

2. Issue the following command for 2600, 2700, 2800 Fibre Channel Adapters to verify that the driver is installed:

```
# esxcli software vib list | grep qlnativefc
```

3. Issue the following command to verify that the driver is loaded:

```
# esxcfg-module -l | grep qlnativefc
```

Configuring the Driver Parameters

You can configure driver parameters for the adapter with the following methods:

- [Configuring Driver Parameters Using the QConvergeConsole vSphere Client Plug-in](#)
- [Configuring Driver Parameters Using ESXCLI](#)
- [Dynamic Enable and Disable Driver Functionalities](#)

Configuring Driver Parameters Using the QConvergeConsole vSphere Client Plug-in

For detailed information on how to use the QConvergeConsole vSphere Client Plug-in to configure driver parameters, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*, "Using the vCenter Server Plug-in" chapter, Host Management: Fibre Channel Parameters section.

For instructions on downloading documentation from the Marvell Web site, refer to ["Downloading Updates and Documentation" on page xiii](#).

Configuring Driver Parameters Using ESXCLI

Use the `esxcfg-module` command to configure the Marvell Fibre Channel and Converged Network Adapter driver parameters. The procedure in this section applies only to Marvell adapters that use the `qlnativefc` driver. It does not apply to the 41000/45000 Series Adapters.

To configure driver parameters on VMware ESXi 7.0 and 8.0:

1. To verify that the Marvell Fibre Channel adapter driver is loaded on the ESXi system, issue the following command.

```
# esxcfg-module -l | grep qlnativefc
qlnativefc                14    1604
```

2. To get the options for a specific module and verify whether it is loaded on boot, issue the following command:

```
# esxcfg-module -g qlnativefc
qlnativefc enabled = 1 options = 'ql2xextended_error_logging=1'
```

3. To list the driver parameters, issue the following command:

```
# esxcfg-module -i qlnativefc
```

4. To set the driver parameters, issue the following command:

```
# esxcfg-module -s <options> qlnativefc
```

Where `<options>` is one of the configurable parameters listed in [Table 2-1 on page 14](#).

For example, issue the following command to set extended error logging in the driver **and** to set the maximum device queue depth reported by the adapter to a value of 64:

```
# esxcfg-module -s "ql2xextended_error_logging=1,
ql2xmaxqdepth=64" qlnativefc
```

5. For the preceding changes to take effect, reboot the server as follows:

```
# reboot
```

NOTE

All configuration changes made using the `esxcfg-module -s` command are *persistent*, meaning that the configuration changes will be saved across system reboots.

Table 2-1 provides an alphabetical list and descriptions of all the Marvell driver configurable parameters for VMware ESXi 7.0 and 8.0.

Table 2-1. Configurable Driver Parameters on VMware ESXi 7.0 and 8.0

Driver Parameter (Type) ^a	Description	Default Value
ql2xallocfwdump (int)	Option to enable allocation of memory for a firmware dump during adapter initialization. Memory allocation requirements vary by ISP type. 0 = Memory not allocated 1 = Allocate memory	1
ql2xcmdtimeout (int)	Firmware time-out value in seconds for <code>scsi</code> command.	0
ql2xdbwr (int)	Option to specify scheme for request queue posting. 0 = Regular doorbell 1 = Hardware-assisted doorbell (faster)	1
ql2xdevdiscgoldfw (int)	Option to enable device discovery with golden firmware. 0 = No discovery 1 = Discover device	0
ql2xdontresethba (int)	1 = Do not reset on failure 0 = Reset on failure	0
ql2xenablemd (int)	ISP82xx: Option to enable or disable the minidump capture capability. 0 = Disable minidump capture 1 = Enable minidump capture	1
ql2xenablemsix (int)	Set to enable MSI or MSI-X interrupt mechanism. 0 = Enable traditional pin-based interrupt mechanism 1 = Enable MSI-X interrupt mechanism 2 = Enable MSI interrupt mechanism	1
ql2xextended_error_logging (int)	Option to enable extended error logging. 0 = No logging 1 = Log errors	0

**Table 2-1. Configurable Driver Parameters on
VMware ESXi 7.0 and 8.0 (Continued)**

Driver Parameter (Type) ^a	Description	Default Value
ql2xfdmienable (int)	Enables FDMI registrations. 0 = No FDMI 1 = Perform FDMI	1
ql2xiidmaenable (int)	Enables iiDMA settings. 1 = Perform iiDMA 0 = No iiDMA	1
ql2xintrdelaytimer (int)	ZIO indicates the waiting time for firmware before it generates an interrupt to the host to notify completion of request.	1
ql2xiocltltimeout (int)	ioctl time-out value in seconds for pass-through commands.	66 sec
ql2xloadfwbin (int)	Option to load firmware from the Flash or driver source for QLA82xx. 0 = Load firmware bundled with driver source 1 = Load from Flash	1
ql2xloginretrycount (int)	Specify an alternate value for the NVRAM login retry count.	0
ql2xlogintimeout (int)	Login time-out value in seconds.	20
ql2xmaxlun (uint)	Defines the maximum LUNs to register with the SCSI midlayer. Maximum is 65535.	FFFFh
ql2xmaxqdepth (int)	Maximum queue depth to report for target devices.	64
ql2xmaxsgs (int)	Maximum scatter or gather entries per I/O request. The default is the maximum entries supported by the OS.	0
ql2xmdcapmask (int)	ISP82xx: Option to set the driver capture mask for firmware minidump as follows: 00h = Use firmware recommended capture mask 03h = Capture mask 3h 0Fh = Capture mask 0Fh 1Fh = Capture mask 1Fh 7Fh = Capture mask 7Fh	1Fh
ql2xoperationmode (int)	Option to disable ZIO mode: set to 0 to disable.	1

**Table 2-1. Configurable Driver Parameters on
VMware ESXi 7.0 and 8.0 (Continued)**

Driver Parameter (Type) ^a	Description	Default Value
ql2xplogiabsentdevice (int)	Port login (PLOGI) to devices that are not present after a fabric scan. This is needed for several broken switches. 0 = No PLOGI 1 = Perform PLOGI	0
ql2xshiftctondsd (int)	Set to control shifting of command type processing based on the total quantity of data segment descriptors (DSDs).	6
ql2xusedefmaxrdreq (int)	0 = Adjust PCIe maximum read request size 1 = Use system default	0
qlport_down_retry (int)	Maximum quantity of command retries to a port that returns a PORT-DOWN status.	10
ql2xbypass_log_throttle (int)	Option to bypass log throttling. 0 = Throttling enabled. 1 = Log all errors	1
ql2xattemptdumponpanic (int)	Attempt firmware dump for each function on the purple screen of death (PSOD). 0 = Do not attempt firmware dump 1 = Attempt firmware dump	0
ql2xdontresethba_83xx (int)	Option to reset the controller upon failure. 1 = Do not reset on failure 0 = Reset on failure	0
ql2xmqqos (int)	Enables multiple queue (MQ) settings. Set to the quantity of queues in MQ quality of service (QoS) mode.	1
ql2xmqcputaffinity (int)	Enables CPU affinity settings for the driver. 1 = Turn on the CPU affinity 0 = No affinity of request and response I/O	1

**Table 2-1. Configurable Driver Parameters on
VMware ESXi 7.0 and 8.0 (Continued)**

Driver Parameter (Type) ^a	Description	Default Value
ql2xfwloadbin (int)	Option to specify location from which to load ISP firmware. 2 = Load firmware using the request_firmware() (hot-plug) interface. 1 = Load firmware from Flash 0 = Use default semantics	0
ql2xdisablenpiv (int)	Option to disable or enable the NPIV feature. 0 = NPIV enabled 1 = NPIV disabled	0
qla2xenablesmartsan (int)	Enable HP Smart SAN management feature. 0 = Disable the Smart SAN feature 1 = Enable the Smart SAN feature	0
ql2xfabricpriorityqos (int)	Option to set the Fabric Priority quality of service (QoS) mode. 0 = Fabric Priority QoS is disabled 1 = Queue-based Fabric Priority QoS enabled 2 = IOCB-based Fabric Priority QoS enabled	0
ql2xvmidsupport ^b (int)	Enable VMID support in the driver (VMware ESXi 7.0 or later). 0 = Disabled 1 = Enabled	1
ql2xvmidexpiration (int)	Expiration time for VMID in minutes (VMware ESXi 7.0 or later). Lack of VM storage I/O activity (for example, if a VM shutdown occurs) leads to VMID de-registration after the expiration time. 0 = No expiration x = Expiration after x minutes	240 (4 hours)
ql2xusesshadowregisters (int)	For ISP27xx: Option to use shadow registers for request/response queues. 0 = Do not use shadow registers 1 = Use shadow registers	1

**Table 2-1. Configurable Driver Parameters on
VMware ESXi 7.0 and 8.0 (Continued)**

Driver Parameter (Type) ^a	Description	Default Value
ql2xnvmesupport ^c (int)	Enable Fibre Channel-Non-volatile memory express (FC-NVMe) support in the drivers (VMware ESXi 7.0 and 8.0 only). 0 = Disabled 1 = Enabled	1
ql2xenhancedabort (int)	Use the enhanced abort feature on 2600, 2700, and 2800 Series Adapters for NVMe I/O. 0 = Disabled 1 = Enabled	1
ql2xrspq_follow_inptr	Follow the response queue in-pointer for response queue updates for 2700 Series and later adapters. 0 = Disabled 1 = Enabled	1
ql2x_scmr_driver_profile (int)	USCM profile to control the throttling policy during fabric congestion. The parameter is used only when a profile is not configured using a Marvell application. 0 = Monitor Only 1 = Conservative 2 = Moderate 3 = Aggressive	0
ql2x_scmr_drop_pct_low_wm (int)	Driver does not throttle requests if the throughput drops below this percentage value of the peak I/O bandwidth. The range of this parameter is from 1 to 99.	50
ql2x_scmr_use_slow_queue (int)	Queue I/O requests to slow-drain devices on slow queue to improve the firmware resource management. 0 = Off 1 = On	1
ql2xvirtuallane (int)	Negotiate for Virtual Lanes (VL) support and use it to route traffic to slow-drain devices when applicable. This parameter is used for 277X and later adapters only. 0 = Off 1 = On	0
ql2xuse_crc1_iocb (int)	Use CRC Type 1 IOCB for DIF IOs.	1

Table 2-1. Configurable Driver Parameters on VMware ESXi 7.0 and 8.0 (Continued)

Driver Parameter (Type) ^a	Description	Default Value
<code>ql2xstoragepoll (int)</code>	Enable the StoragePoll feature (ESX 8.0 only). 0 = Disabled 1 = Enabled	0
<code>ql2xrspq_follow_inptr_legacy</code>	Follow response queue in-pointer for response queue updates for adapters earlier than 2700 Series. 0 = Disabled 1 = Enabled	0
<code>ql2xcontrol_edc_rdf</code>	Allows the driver to control sending register diagnostic function (RDF)/exchange diagnostic capabilities (EDC) commands for Universal SAN Congestion Mitigation (USCM) instead of the firmware (default). 0 = Disabled (firmware control) 1 = Enabled	1
<code>ql2xautodetectsfp (int)</code>	Detect SFP range and set appropriate distance. 0 = Disabled 1 = Enabled	1
<code>ql2xmaxheapsize ^d(int)</code>	Max heap size for driver memory allocations. Maximum value is 7FFF_FFFFh Default: 0x8000000 (128 MB)	0x8000000 (128 MB)

^a int = integer; uint = unsigned integer

^b When `ql2xvmidsupport` is enabled, you must set the parameter `ql2xfabricpriorityqos` to 0.

^c `ql2xnvmesupport` is supported only on 2690, 2740/2760, 2770, and 2870 Series Adapters.

^d`ql2xmaxheapsize` For configurations that require more memory, such as max 8 adapters in the system, modify this value to 512MB (20000000h).

Dynamic Enable and Disable Driver Functionalities

The Marvell driver provides a mechanism to dynamically enable or disable some functionalities in VMware ESXi 7.0 and 8.0. The procedure in this section applies only to Marvell adapters that use the qlnativefc driver. It does not apply to the 41000/45000 Series Adapters.

To configure a parameter on all adapters, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i MOD_PARM/qllogic  
-s scsi-qla<option> -k DRIVERINFO
```

Where `<option>` is one of the configurable parameters listed in [Table 2-2](#). For example, the following command enables extended error logging:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i MOD_PARM/qllogic  
-s scsi-qlaenable-log -k DRIVERINFO
```

**Table 2-2. Dynamic Configurable Parameters:
ESXi 7.0 and 8.0**

Option	Function
enable-log	Enabling extended error logging
disable-log	Disabling extended error logging
donotreset	Clearing reset of failure
doreset	Setting reset of failure
disable-npiv	Disabling NPIV
enable-npiv	Enabling NPIV

To configure a parameter for a specific adapter, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<x>/qllogic  
-s scsi-<option> -k ADAPTER
```

Where `<option>` is one of the configurable parameters listed in [Table 2-3](#) and `<x>` is one of the adapter's vmhba numbers.

For example, the following command schedules the loop initialization process (LIP) for keyval 3:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba65/qllogic  
-s scsi-qlalip -k ADAPTER
```

Table 2-3. Dynamic Configurable Parameters for Each Adapter: ESXi 7.0 and 8.0

Option	Function
chip-reset	Requesting a chip resets
fwDump	Initiating fw_dump
enable-md	Enabling minidump capture
disable-md	Disabling minidump capture
lip	Scheduling LIP

Deploying NPIV for VMware ESXi 7.0 and 8.0

Marvell Fibre Channel and Converged Network Adapters support N_Port ID virtualization (NPIV) for Fibre Channel SANs. NPIV enables each virtual machine to have its own Fibre Channel worldwide port name (WWPN) by creating multiple virtual adapters on a single physical adapter.

VMware ESXi 7.0 and 8.0 enable NPIV support on Marvell Fibre Channel 16/32/64Gb Adapters and 10/25/40/50/100GbE Converged Network Adapters. Note that VMware ESXi 7.0 and 8.0 support NPIV only on raw device mapping (RDM) devices.

To configure NPIV, the Fibre Channel switch port must be configured to enable NPIV. The specific procedure to enable NPIV on the switch port depends on the switch itself. For details, refer to the Fibre Channel switch documentation.

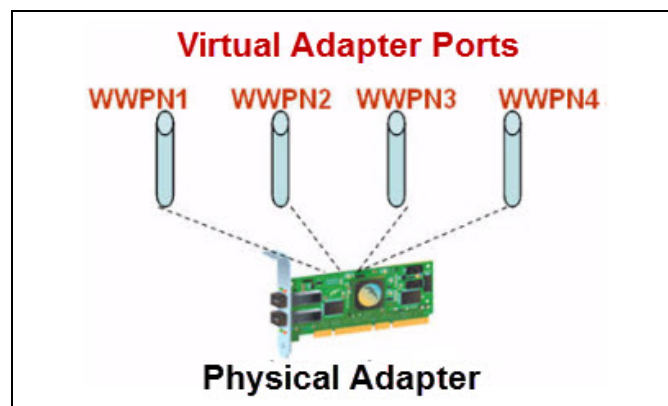


Figure 2-4. NPIV Example

The VMware technical note, *Configuring and Troubleshooting N-Port ID Virtualization*, describes NPIV deployment for VMware ESXi in greater detail. This document is available on the VMware Website at:

http://www.vmware.com/content/dam/digitalmarketing/vmware/en/pdf/techpaper/vsp_4_vsp4_41_npivconfig-technical-note.pdf

Monitoring NPIV Virtual Ports from Management Tools

The Marvell management tool (QConvergeConsole vSphere Client Plug-in) also supports the NPIV functionality in the drivers. The plug-ins can display the virtual ports configured on the system and provide additional information on the virtual ports, including diagnostics and monitoring information. The plug-ins generate events and notify the user of any change (such as virtual port creation and deletion) at the back end to the virtual ports.

NOTE

For detailed information on configuring Marvell adapters using the plug-ins, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*.

Figure 2-5 shows a typical virtual environment in the QConvergeConsole vSphere Client Plug-in with physical and virtual ports. The proc node provides information on the quantity of virtual ports and their individual states, as well as the target devices with which they can communicate (see also “[Identifying Marvell Adapters Using the ESXi Shell](#)” on page 7).

2-Configuring Fibre Channel Adapters 2600, 2700, 2800
Monitoring NPIV Virtual Ports from Management Tools

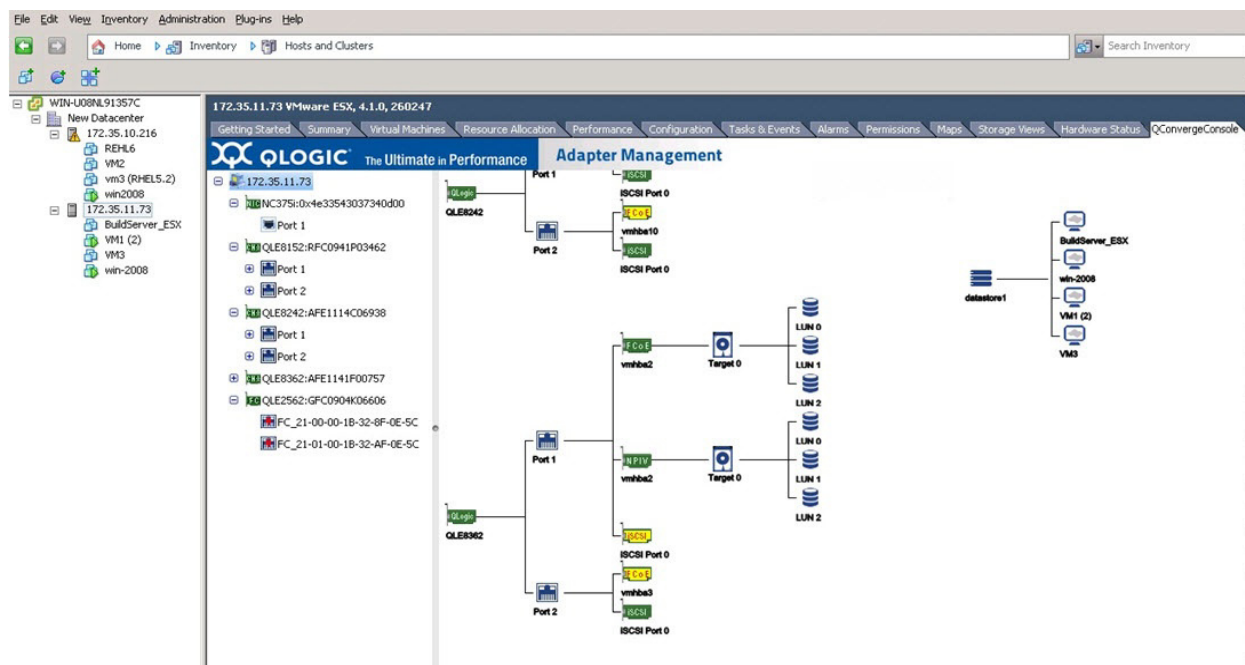


Figure 2-5. NPIV in vCenter Server Plug-in

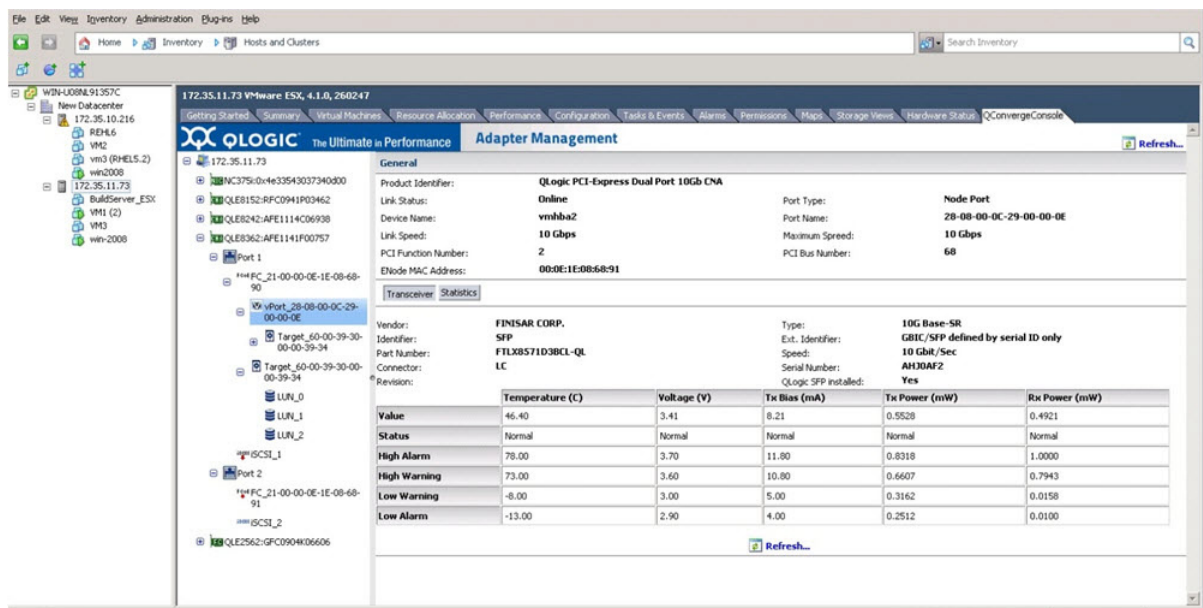


Figure 2-6. Virtual Port Information in vCenter Server Plug-in

Deploying VMID for VMware ESXi 7.0 and 8.0

Marvell Fibre Channel and Converged Network Adapters support VMID for Fibre Channel SANs. VMID support allows the association of a flow with a specific VM.

Marvell's drivers for VMware ESXi 7.0 and 8.0 offer support for VMID on Marvell's 269x and 2700 Series Fibre Channel Enhanced 16GFC and 32GFC Adapters, as well as the 2800 Series Fibre Channel 64GFC Adapters.

To configure VMID, the Fibre Channel switch port must be configured to enable VMID. The specific procedure to enable VMID on the switch port depends on the switch itself. For details, refer to the Fibre Channel switch documentation.

NOTE

ESXi 8.0 U3 now associates and displays VC UUIDs with VMIDs. For more information, see the VMware vSphere 8.0 U3 documentation.

Enabling USCM FPIN-LI/MPIO

USCM multipath switching based on marginal links with integrity issues can be enabled with ESX 8.0 U3 or later with Marvell QLogic QLE2700 and QLE2800 adapters using FC PowerKit or ESXCLI. See *Marvell® QLogic® PowerKit User Guide* for details.

NOTE

For more information about enabling FPINs for FPIN-LI/MPIO operation in Pluggable Storage Architecture (PSA), see the VMware vSphere 8.0 U3 documentation.

Configuring Boot from SAN

Boot from SAN refers to installing and booting a server's operating system from a storage device attached to the SAN instead of from a locally attached storage device. The OS is installed on one or more LUNs in the SAN array, and the Fibre Channel and Converged Network Adapters are configured to boot from the specified LUN. Boot from SAN provides several benefits including:

- Reducing server costs
- Ease of management
- Improved disaster tolerance
- Improved boot LUN availability

VMware ESXi 7.0 and 8.0 provide boot from SAN capability on Marvell Fibre Channel and Converged Network Adapters. Non-Volatile Memory Express (NVMe) boot from SAN is supported on VMware ESXi 7.0 and later. For more information, see the Boot from SAN Setup section in one of the following Marvell user's guides:

- *User's Guide: Fibre Channel Adapter (2600 Series)*
- *User's Guide: Fibre Channel Adapter (2700 Series)*
- *User's Guide: Fibre Channel Adapter (2800 Series)*


For storage array and Fibre Channel switch configuration, refer to the appropriate user manual for the device.

For VMware ESXi 7.0 and 8.0-specific configuration requirements, refer to the appropriate *VMware vSphere Storage* document:

<https://docs.vmware.com/en/VMware-vSphere/index.html>

To configure the Marvell Fibre Channel Adapter for boot from SAN using Fast!UTIL:

1. After installing the adapter, boot the server into BIOS.
2. To start the *Fast!UTIL* configuration utility, at the Marvell BIOS banner screen ([Figure 2-7](#)), press the CTRL+Q keys.

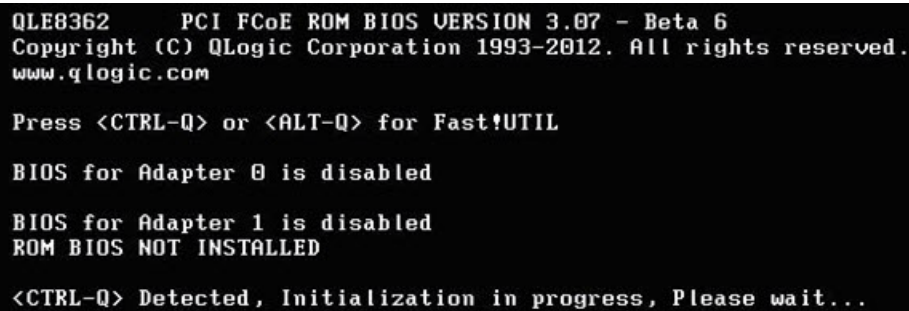

```
QLE8362    PCI FCoE ROM BIOS VERSION 3.07 - Beta 6
Copyright (C) QLogic Corporation 1993-2012. All rights reserved.
www.qlogic.com

Press <CTRL-Q> or <ALT-Q> for Fast!UTIL

BIOS for Adapter 0 is disabled

BIOS for Adapter 1 is disabled
ROM BIOS NOT INSTALLED

<CTRL-Q> Detected, Initialization in progress, Please wait...
```

Figure 2-7. Starting Fast!UTIL from the BIOS Screen

3. In the *Fast!UTIL* utility, choose the appropriate adapter port to be configured.
4. On the *Fast!UTIL* Options page, select **Configuration Settings**, and then press ENTER.
5. On the Configuration Settings page, select **Host Adapter Settings**, and then press ENTER.
6. To set the BIOS to search for SCSI devices:
 - a. On the Host Adapter Settings page, select **Host Adapter BIOS**.
 - b. To toggle the value to **Enabled**, press ENTER.
 - c. To exit, press ESC.

7. After the **Host Adapter BIOS** is enabled, select the boot device as shown in the following table.

Enable Selectable Boot	WWPN or LUN Boot List	Device Boot
No	x	BIOS configures the first disk drive it finds as boot device.
Yes	None specified	BIOS configures the first disk drive it finds that is also a LUN 0 as boot device.
Yes	Specified	BIOS scans through the specified boot WWPN or LUN list until it finds a disk drive, and then configures it as the boot device.

- a. Choose **Selectable Boot Settings**, and then press ENTER.
 - b. On the Selectable Boot Settings page, choose **Selectable Boot**.
 - c. Toggle the value to **Enabled**, and then press ENTER.
8. After the Selectable Boot is enabled, select the boot device. Marvell Fibre Channel Adapters allow the specification of up to four WWPNS or LUNs as boot devices. To select up to four boot devices, follow these steps:
- a. To move to the **Primary** location of the **Selectable Boot List** menu, press the DOWN ARROW key.
 - b. To see a list of accessible devices in the **Select Fibre Channel Device** menu, press ENTER.
 - c. Press the DOWN ARROW key to scroll down to the device you want to put into your **Selectable Boot** menu list.
 - d. To select the requested device and load it into the **Selectable Boot** menu list, press ENTER.
 - e. (Optional) Repeat this step to specify up to three alternate boot devices.

Now the ESX system is ready to boot from SAN from the specified boot devices.

NOTE

Marvell recommends that when both the adapter BIOS and the **Selectable Boot** option are enabled, you always select a device and put it in the **Primary** boot device location of the **Selectable Boot** menu list.

To configure the Marvell Fibre Channel Adapter for boot from SAN using the QConvergeConsole plug-in for VMware vCenter Server:

For detailed information on how to use the vCenter Server plug-in to configure boot from SAN, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*, in the section Boot Configuration—Fibre Channel Port.

For instructions on downloading documentation from the Marvell Web site, refer to [“Downloading Updates and Documentation” on page xiii](#).

Support for FC-NVMe

For information about using FC-NVMe, see the following documents:

- *User's Guide: Fibre Channel Adapter (2600 Series)*
- *User's Guide: Fibre Channel Adapter (2700 Series)*
- *User's Guide: Fibre Channel Adapter (2800 Series)*

Support for Universal SAN Congestion Mitigation (USCM)

For information about using VMware, see the following documents:

- *User's Guide: Marvell ESXCLI Plug-in for VMware vSphere®*
- *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere (2600, 2700, 2800, 3400, 41000, 45000 Series Adapters)*

For information about using Marvell Fibre Channel (MRVLFC) PowerKit with Linux, VMware, and Windows, see the following document:

- *User's Guide: Marvell QLogic PowerKit for 2600, 2700, 2800 Series Fibre Channel Adapters*

For information about using Marvell QLogic FC QConvergeConsole Extension for Windows Admin Center, see the following document:

- *User's Guide: Marvell QLogic Fibre Channel QConvergeConsole Extension for Windows Admin Center*

For information about using QConvergeConsole Plug-in for VMware vCenter Server and QConvergeConsole Plug-in, see the following document:

- *QConvergeConsole Plug-ins for VMware vSphere*

3

Configuring 41000/45000 Converged Network Adapters

This chapter provides the following information about configuring 41000/45000 Series Converged Network Adapters for VMware storage driver:

- [“Software Components” on page 29](#)
- [“Driver Installation and Verification” on page 29](#)
- [“Driver Installation and Verification” on page 29](#)
- [“iSCSI Driver qedi” on page 30](#)
- [“FCoE Driver qedf” on page 37](#)
- [“Configuring Boot from SAN” on page 41](#)

Software Components

The Marvell FastLinQ 41000/45000 Series Converged Network Adapters storage drivers are comprised of a monolithic iSCSI driver (qedi) and a monolithic FCoE driver (qedf). Both of these drivers are PCI drivers, and can support iSCSI and FCoE (respectively), independent of the other protocol components and drivers.

The iSCSI driver (qedi) depends on the VMware infrastructure for specific functionality, for example, iscsid, which is VMware's iSCSI daemon. The iSCSI driver depends on iscsid for initiating and servicing specific IP services (ARP, DHCP), and session and connection management on its behalf.


The iSCSI and FCoE drivers are packaged with a compatible NIC driver for proper interoperability. If multiple protocols must co-exist, the drivers must be compatible to ensure that they do not initialize the hardware differently.

Driver Installation and Verification

To install the driver package, issue the following command:

```
# esxcli software vib install -d /<absolute_path_to_the_driver_bundle.zip>
```

Figure 3-1 shows an example of the driver installation package command.

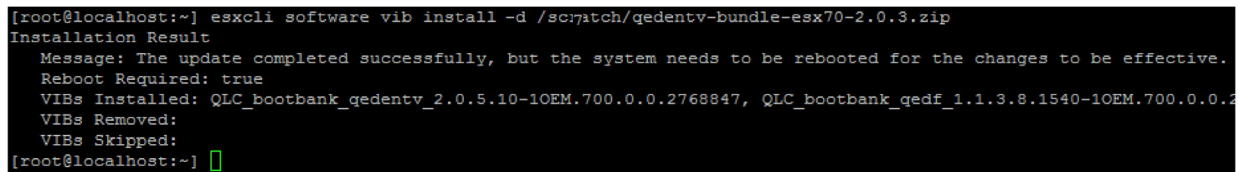

```
[root@localhost:~] esxcli software vib install -d /scratch/qedentv-bundle-esx70-2.0.3.zip
Installation Result
  Message: The update completed successfully, but the system needs to be rebooted for the changes to be effective.
  Reboot Required: true
  VIBs Installed: QLC_bootbank_qedentv_2.0.5.10-10EM.700.0.0.2768847, QLC_bootbank_qedf_1.1.3.8.1540-10EM.700.0.0.2768847
  VIBs Removed:
  VIBs Skipped:
[root@localhost:~] █
```

Figure 3-1. Driver Installation Package Command

A typical package contains driver VIBs for NIC, FCoE, and iSCSI.

Issue the appropriate command to verify that the driver has been loaded:

```
# esxcli software vib list | grep qed
```

Following is a sample output.

```
[root@localhost:/vmfs/volumes/5ab392c9-b06d7a0f-e48e-24b6fdf76f7a] esxcli
software vib list | grep qed
qedentv      3.9.17.1-10EM.670.0.0.7535516   QLC  VMwareCertified  2018-04-19
qedf         2.0.0.6s7-10EM.650.0.0.4598673  QLC  VMwareCertified  2018-04-26
qedrntv      3.9.17.0-10EM.670.0.0.7535516   QLC  VMwareCertified  2018-04-19
qedi         1.2.11.0-10EM.600.0.0.2494585   QLC  VMwareCertified  2018-04-19
```

Following installation, you must reboot the system for the changes to take effect.

iSCSI Driver qedi

This section provides the following information for the qedi driver:

- [Module Parameters for qedi](#)
- [Configuring the qedi Driver](#)
- [Verifying iSCSI Driver Presence](#)
- [Target Configuration](#)
- [Differences from bnx2i](#)
- [Differences from bnx2fc](#)

Module Parameters for qedi

Module parameters for the qedi driver include the following:

- **qedi_debug** is the debug message level to print various driver debug information. This is a bit field that enables logging in different subsections.

Basic Info = 0x0001,
Additional Debug = 0x0002,
Probe time messages = 0x0004,
Link handling = 0x0008,
Timer related messages = 0x0010,
Connection related messages = 0x0020,
Interface related messages = 0x0040,
Receive Errors = 0x0080,
Transmit Errors = 0x0100,
Command queuing related messages = 0x0200,
Interrupt context messages = 0x0400,
Task Management Logs = 0x8000,
All Debug messages: 0xffff
- **qedi_int_mode** forces an interrupt mode other than MSI-X.

0 - MSI-X (Default)
1 - INTX
2 - MSI
- **qedi_attemptdumponpanic** attempts to save a firmware dump for each function when the system panics (PSOD).

1 - Attempt firmware dump (Default)
0 - Do not attempt firmware dump

- **qedi_cpuaffinity** enables MQ CPU-Affinity.
 - 0 - Disable
 - 1 - Enable (Default)
- **qedi_ooo_enable** enables processing and handling of iSCSI out-of-order packets.
 - 0 - Disable
 - 1 - Enable (Default)

Configuring the qedi Driver

The qedi driver automatically binds to the exposed iSCSI functions of the Converged Network Adapter. Configure the target using ESXCLI (VMware's command line tool) or vCenter/VI Client (VMware's Web GUI) tool. This functionality and operation is similar to that of the bnx2i driver.

Verifying iSCSI Driver Presence

After installing the driver package and rebooting, verify the iSCSI driver presence.

To verify that the iSCSI devices were detected correctly:

1. To verify that the qedi driver module was loaded, issue the following command:

```
~# vmkload_mod -l | grep qedi
qedi 1      1992
```
2. To determine if the iSCSI functions were enumerated:
 - a. In the tree pane on the left under **Storage**, click **Storage Adapters** as shown in [Figure 3-2](#).
 - b. In the content pane under the Marvell adapters heading, iSCSI devices are listed. In the following example, two iSCSI CNA devices were detected and listed as **vmhba32** and **vmhba33**.

3-Configuring 41000/45000 Converged Network Adapters
iSCSI Driver qedi

c. Under **Adapter Details**, select a vmhba to view more information.

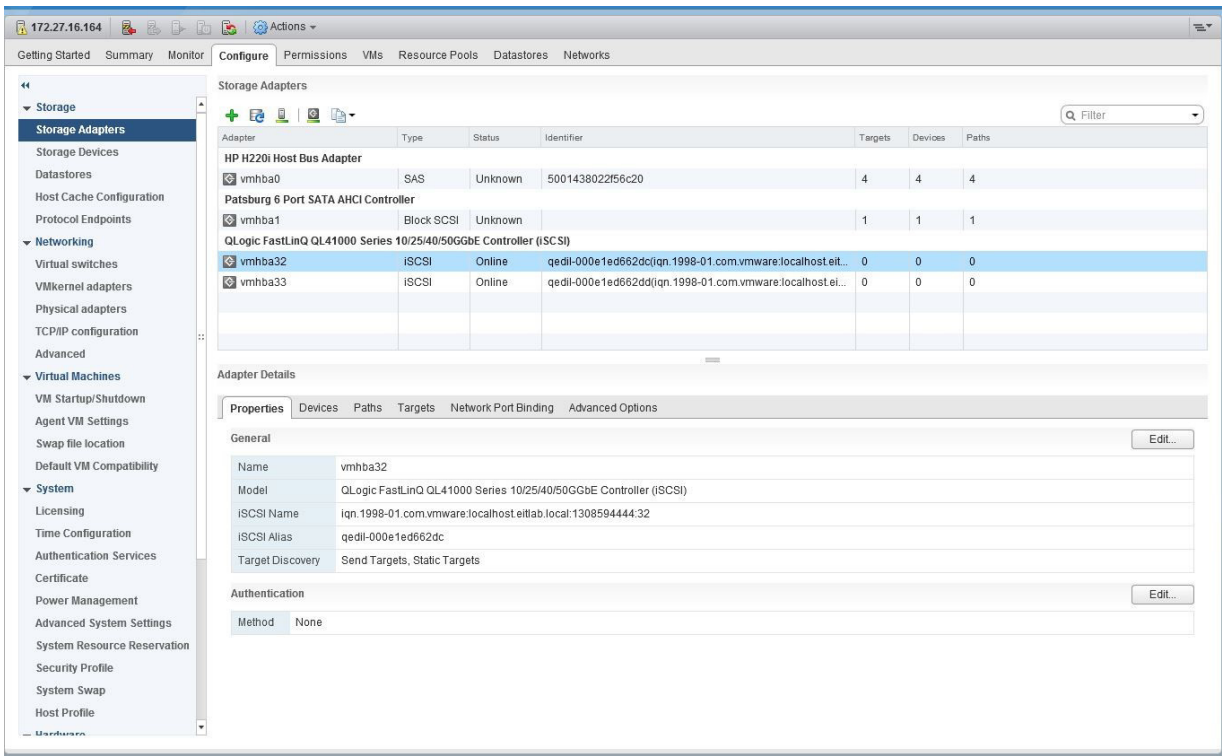


Figure 3-2. Storage Adapters

3. To use target functionality, associate the vmnic to the iSCSI adapter:
 - a. Under **Adapter Details**, click the **Network Port Binding** tab as shown in [Figure 3-3](#).
 - b. On the Network Port Binding page, associate the vmnic to iSCSI adapter by selecting the respective vmnic for iSCSI vmhba.

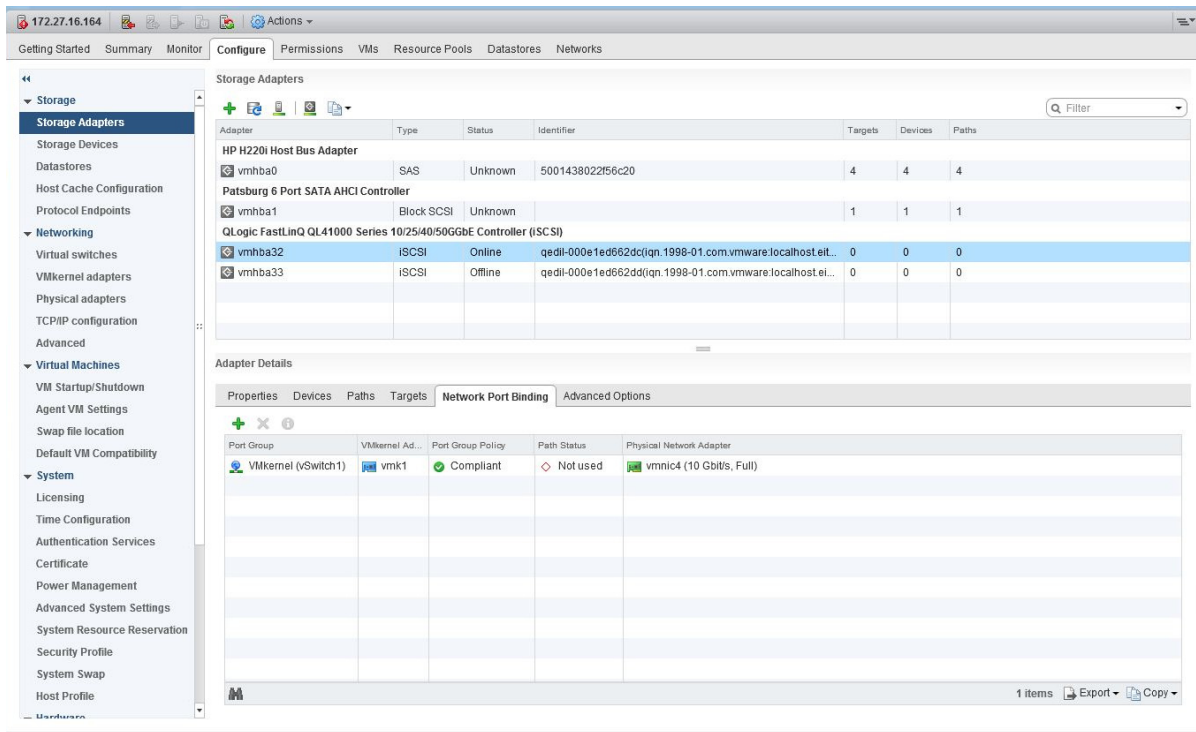


Figure 3-3. Network Port Binding Page

Target Configuration

After successfully completing the network port binding, proceed with either:

- [Static Target Configuration](#)
- [Dynamic Target Configuration](#)

Static Target Configuration

To configure a static target:

1. Complete the Add Static Target Server dialog box as shown in [Figure 3-4](#):
 - a. Type the iSCSI server name in the **iSCSI Server** box.
 - b. Type the port number in the **Port** box.
 - c. Type the iSCSI target name in the **iSCSI Target Name** box.

- d. Select the **Inherit settings from parent** check box (if applicable).
- e. Click **OK**.

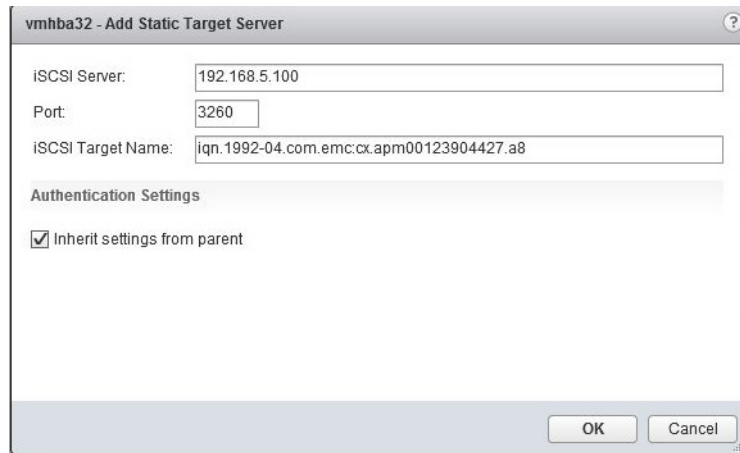


Figure 3-4. Add Static Target Server

The following occurs:

- ☐ An event is initiated to re-scan the adapter.
- ☐ Devices allowed by the target are visible in the result list.

- ❑ After static configuration is added, it is listed under **Adapter Details**, **Targets** page, **Static Discovery**, as shown in [Figure 3-5](#).

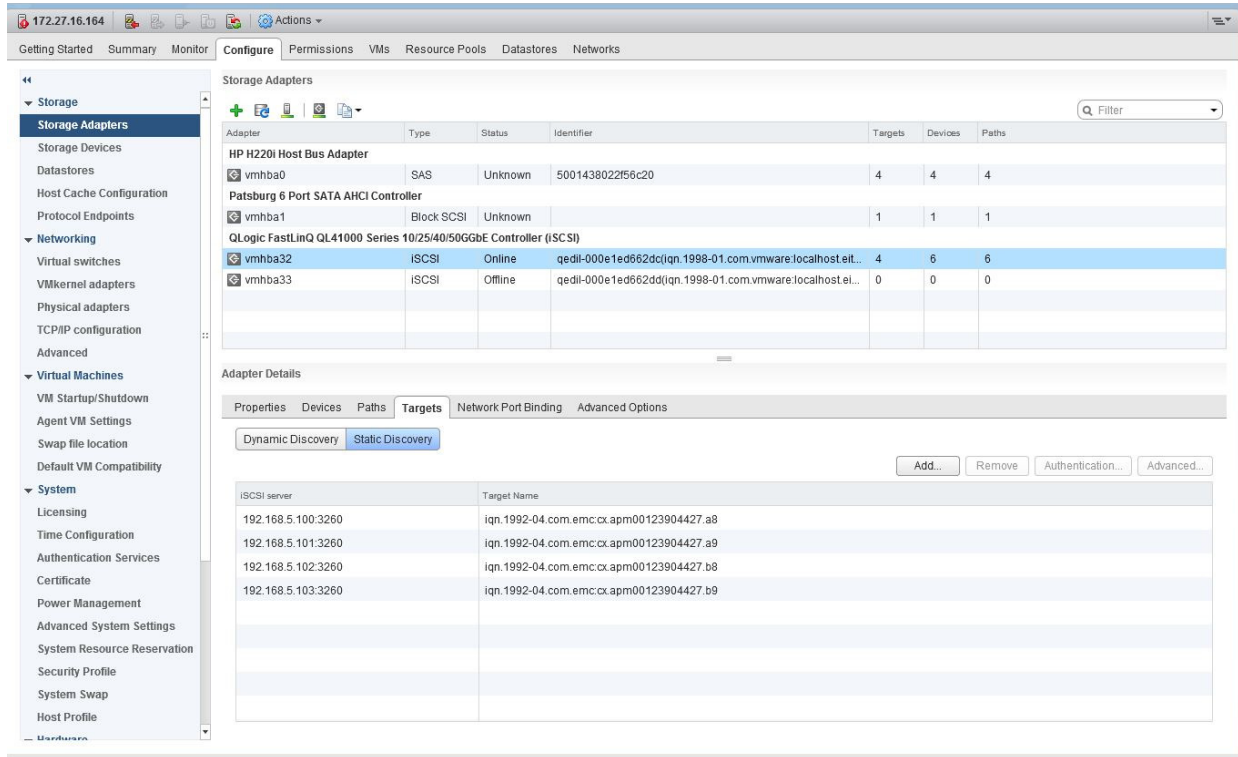


Figure 3-5. Static Configuration Added

2. After the rescan, view discovered storage devices per adapter on the **Devices** or **Path** pages.

Dynamic Target Configuration

To configure a dynamic target:

1. Complete the **Add Send Target Server** dialog box as shown in [Figure 3-6](#):
 - a. Type the iSCSI server name in the **iSCSI Server** box.
 - b. Type the port number in the **Port** box.
 - c. Select the **Inherit settings from parent** check box (if applicable).

d. Click **OK**.

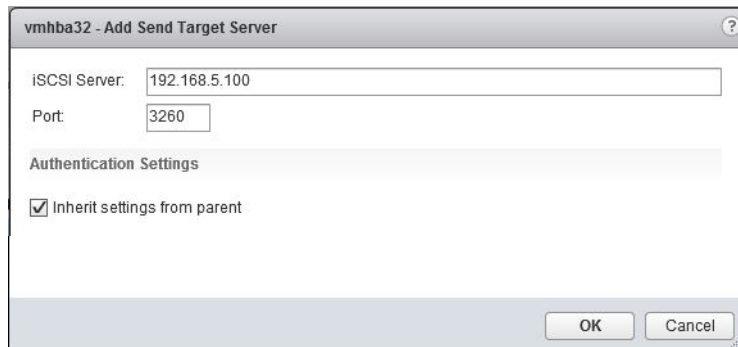


Figure 3-6. Add Send Target Server

The following occurs:

- ☐ All targets are discovered under the provided IP.
- ☐ The iscsid initiates a login to each of these targets.
- ☐ An event is initiated to re-scan the adapter.
- ☐ Devices allowed by the target are visible in the result list.
- ☐ After dynamic configuration is added, it is listed under **Adapter Details**, Targets page, Dynamic Discovery, as shown in [Figure 3-7](#).

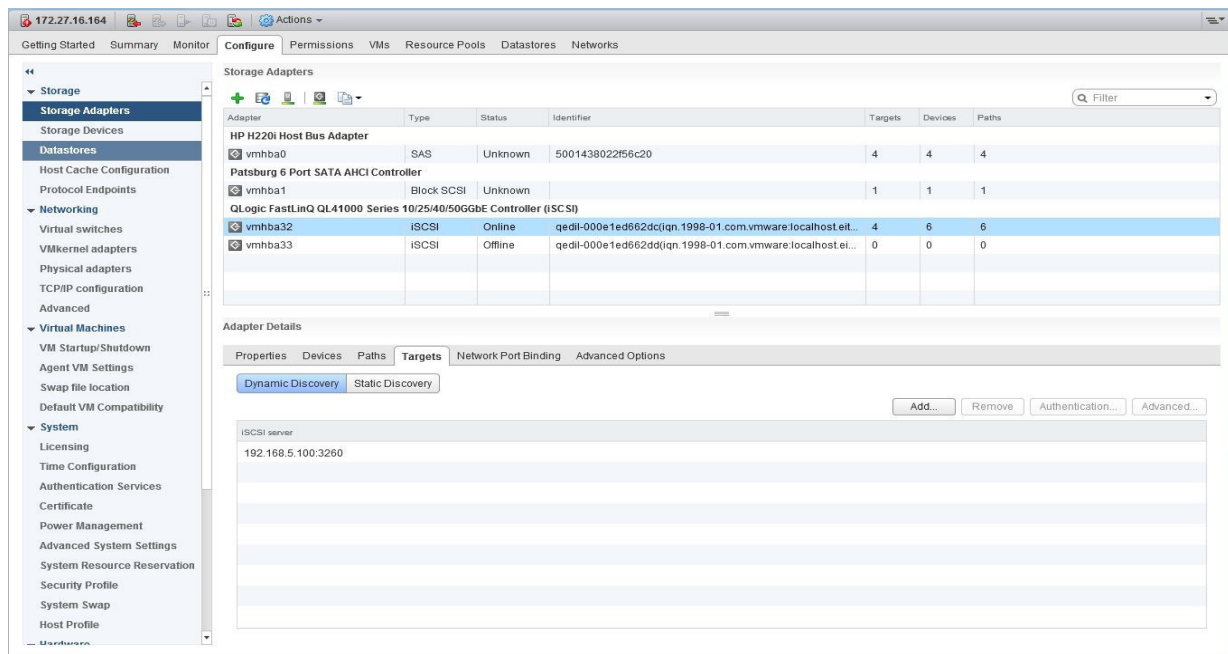


Figure 3-7. Dynamic Target Configuration Added

2. After the rescan, view discovered storage devices per adapter on the Devices or Path pages.

Differences from bnx2i

Significant differences exist between qedi, the driver for the Marvell FastLinQ 41000/45000 Series 10/25/40/50/100GbE Controller (iSCSI) and the previous 8400 (578xx) Marvell iSCSI offload drivers, bnx2i (legacy) and qfle3i (native). Differences include:

- qedi directly binds to a PCI function exposed by the CNA device, and hence independently controls a PCI function.
- qedi is not dependent on a network driver.
- qedi can independently initialize and start the hardware.

Differences from bnx2fc

Significant differences exist between qedf, the driver for the Marvell FastLinQ 41000/45000 Series 10/25/40/50/100GbE controller (FCoE) and the previous Marvell FCoE offload driver, bnx2fc (legacy). Differences include:

- qedf binds directly to a PCI function exposed by the CNA device, and therefore independently controls a PCI function.
- qedf is not dependent on a network driver; therefore, no configuration is needed to initiate device discovery (unlike bnx2fc).
- qedf can independently initialize and start the hardware.

FCoE Driver qedf

This section provides the following information for the qedf driver:

- [Module Parameters for qedf](#)
- [Verifying FCoE Driver Presence](#)
- [FCoE Switch and Storage Configuration](#)

Module Parameters for qedf

Module parameters for the qedf driver include the following:

- `qedf_debug_level` is the debug message level to print various driver debug information. This is a bit field that enables logging in different subsections:

```
0x0 : Default
0x00000010 /* scsi cmd error, cleanup */
0x00000020 /* Session setup, cleanup, etc' */
0x00000040 /* Device events, link, mtu, etc' */
```

```

0x00000080    /* SCSI Task Mgmt */
0x00000100    /* lport related */
0x00000200    /* rport related */
0x00000400    /* ELS logs */
0x00000800    /* fcoe L2 frame related logs*/
0x00001000    /* Init logs */
0x00002000    /* Link discovery events */
0x00004000    /* Timer events */
0x00008000    /* Informational logs, e.g. device MFS, * MAC
address, WWPN, WWNN */
0x00010000    /* Middle Path (MP) related */
0x00020000    /* log non-fatal errors */
0x00040000    /* Application based code */
0x00080000    /* unsolicited event */
0x00100000    /* Log fcp errors */
0x00200000    /* Log vlan info */
0x01000000    /* Log libfc exceptions */
0x02000000    /* Log libfc min info */
0x04000000    /* Log libfc medium info */
0x08000000    /* log libfc extended info */
0x20000000    /* Session setup, cleanup, etc' */
0x40000000    /* scatter/gather element information */
0x80000000    /* Extensively informative messages */
0xffffffff    /* LOG all messages */

```

- **qedf_int_mode** forces an interrupt mode other than MSI-X.

```

0 - MSI-X (Default)
1 - INTX
2 - MSI

```

- **qedf_attemptdumponpanic** attempts to save a firmware dump for each function when the system panics (PSOD).

```

1 - Attempt firmware dump (Default)
0 - Do not attempt firmware dump

```

- **qedf_dev_loss_timer** is the time (in seconds) after target device disappears until the `NO_CONNECT` status is returned to SCSI layer.

```

0-30 - Permitted Range
10 - Default

```

- **qedf_maxqdepth** is the maximum queue depth to report for target devices.

1-128 - Permitted Range

64 - Default

CAUTION

The `qedf_maxqdepth` value is sensitive to how internal firmware resources are partitioned. Changing this parameter may negatively impact performance on other targets. Therefore, change this value only after consulting with Marvell Engineers, or at your own risk.

- **qedf_enable_r_a_tov** enables or disables the user-defined `R_A_TOV`.

0 - Use fabric defined `R_A_TOV`

1 - Use user-defined `R_A_TOV`

- **qedf_r_a_tov** sets the user-defined `R_A_TOV` value. This value is only applicable if `qedf_enable_r_a_tov` is set to 1.

1-20: Permitted Value

10 - Default

- **qedf_max_luns** adjusts the maximum LUNs supported by the driver.

1-512 - Permitted Range

256 - Default

- **qedf_devloss_tmo** adjusts the device link loss timeout value (in seconds).

1-30: Permitted Range

10: Default

Verifying FCoE Driver Presence

After installing the driver package and rebooting, verify that the FCoE devices are correctly detected.

To verify the FCoE driver:

1. To verify that the `qedf` driver module was loaded, issue the following command:

```
~# vmkload_mod -l | grep qedf
qedf 1      1992
```

2. Verify that the FCoE functions are listed. In the VC Client, click the **Storage Adapter** tab. [Figure 3-8](#) shows an example where two FCoE CNA devices are detected and listed as **vmhba54** and **vmhba55**.

Adapter	Type	Status	Identifier	Targets	Devices	Paths
vmhba3	Fibre Cha...	Online	20:00:00:24:ff:34:0f:a1 21:00:00:24:ff:34:0f:a1	0	0	0
ISP2532-based 8Gb Fibre Channel to PCI Express HBA						
vmhba4	Fibre Cha...	Unknown	20:00:00:24:ff:42:4e:14 21:00:00:24:ff:42:4e:14	0	0	0
vmhba5	Fibre Cha...	Unknown	20:00:00:24:ff:42:4e:15 21:00:00:24:ff:42:4e:15	0	0	0
QLogic FastLinQ QL41000 Series 10/25/40/50GbE Controller (iSCSI)						
vmhba32	iSCSI	Unbound	qedil-000e1ec4c6c6(iqn.1998-01.com.vmware.localhost:11...	0	0	0
vmhba33	iSCSI	Unbound	qedil-000e1ec4c6c7(iqn.1998-01.com.vmware.localhost:11...	0	0	0
QLogic FastLinQ QL45000 Series 40G/100G Controller (FCoE)						
vmhba64	Fibre Cha...	Online	10:00:00:0e:1e:c4:c6:c4 20:00:00:0e:1e:c4:c6:c4	3	48	90
vmhba65	Fibre Cha...	Online	10:00:00:0e:1e:c4:c6:c5 20:00:00:0e:1e:c4:c6:c5	3	48	90
USB Storage Controller						
vmhba35	Block SCSI	Unknown		1	2	2

Figure 3-8. VC Client: Storage Adapter Page

FCoE Switch and Storage Configuration

Complete the following steps after the FCoE driver has been installed from the switch vendor.

To configure the FCoE switch and storage:

1. Configure the vfc port on the switch.
2. Enable DCBX on the switch in Auto mode (negotiating mode).
3. Ensure that Priority Flow Control is enabled.
4. Ensure that the initiators and targets are listed on the name server database.
5. Add the initiator and the target into the same zone.
6. Ensure that the storage is configured to expose the required targets and LUNs to the initiator.
7. On each of the initiator ports, issue the `Rescan` command.
8. Ensure that all the exposed targets are visible on the VC Client.

Configuring Boot from SAN

Boot from SAN refers to installing and booting a server's operating system from a storage device attached to the SAN instead of from a locally attached storage device. The OS is installed on one or more LUNs in the SAN array, and the Fibre Channel and Converged Network Adapters are configured to boot from the specified LUN. Boot from SAN provides several benefits including:

- Reducing server costs
- Ease of management
- Improved disaster tolerance
- Improved boot LUN availability

VMware ESXi 7.0 and 8.0 provide boot from SAN capability on Marvell Fibre Channel and Converged Network Adapters. Non-Volatile Memory Express (NVMe) boot from SAN is supported on VMware ESXi 7.0 and later.

For storage array and switch configuration, refer to the appropriate user manual for the device.

For FastLinQ 41000/45000 iSCSI boot from SAN information, see the applicable user's guide.

For VMware ESXi 7.0 and 8.0-specific configuration requirements, refer to the appropriate *VMware vSphere Storage* document:

<https://docs.vmware.com/en/VMware-vSphere/index.html>

- In switch independent NIC Partitioning (NPAR) mode, the FastLinQ 41000/45000 supports FCoE on the single partition that has FCoE-Offload enabled. But, when the FastLinQ 41000/45000 is in NPAR mode, FCoE boot from SAN is only supported on the first partition of a port and that first partition must have FCoE-Offload enabled.
- On the 41000/45000 in Default and NPAR mode:
 - ☐ FCoE boot is supported on the partition that has FCoE-Offload enabled on it.
 - ☐ Software iSCSI boot is supported on the Ethernet-enabled first partition. iSCSI-Offloaded boot from SAN is not supported on VMware.
- On the QL41000/45000, software iSCSI is supported on any Ethernet enabled partition, while iSCSI-Offload is supported on an iSCSI-Offload enabled partition.
- In Single Function mode, the FastLinQ 41000/45000 supports both FCoE and FCoE boot from SAN, but that port must have FCoE-Offload enabled.

- The FastLinQ 41000/45000 supports iSCSI-Offload on the port that has iSCSI-Offload enabled. The FastLinQ 41000/45000 supports software iSCSI boot from SAN only on VMware in both Single Function and NPAR modes. The FastLinQ 41000/45000 also supports software iSCSI on the Ethernet-enabled port.

The FastLinQ 41000/45000 NPAR mode per partition Quality of Service Minimum Bandwidth (Relative Bandwidth Weight) settings are superseded by their Data Center Bridging (DCB) per traffic class Enhanced Transmission Selection (ETS) settings.

The FastLinQ 41000/45000 NIC extended partitioning (NPAREP) mode per partition QoS Minimum Bandwidth (Relative Bandwidth Weight) settings are used with their DCB per traffic class ETS settings.

NPAR/NPAREP mode's Minimum Bandwidth (Relative Bandwidth Weight) settings provide a minimum guaranteed send bandwidth to each individual partition when there is more bandwidth to send (over two or more partitions) than available on their shared physical port. NPAR/NPAREP mode settings are only for send traffic.


DCB mode's ETS settings provide a minimum guaranteed bandwidth to each individual designated traffic class type (or priority group) when there is more bandwidth (over two or more traffic class types) than available on their shared physical port. DCB ETS settings are normally bidirectional.

In all cases, the NPAR/NPAREP per partition Maximum Bandwidth settings are always used.

Additionally, DCB is required for lossless iSCSI-Offload-TLV over DCB and FastLinQ 41000/45000 RoCE and RoCEv2 traffic types.

To configure the Marvell Converged Network Adapter for boot from SAN using Fast!UTIL:

1. After installing the adapter, boot the server into BIOS.
2. To start the *Fast!UTIL* configuration utility, at the Marvell BIOS banner screen ([Figure 3-9](#)), press the CTRL+Q keys.

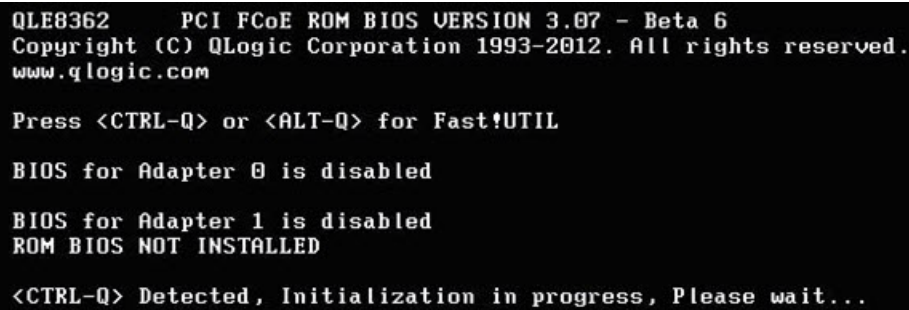

```
QLE8362      PCI FCoE ROM BIOS VERSION 3.07 - Beta 6
Copyright (C) QLogic Corporation 1993-2012. All rights reserved.
www.qlogic.com

Press <CTRL-Q> or <ALT-Q> for Fast!UTIL

BIOS for Adapter 0 is disabled

BIOS for Adapter 1 is disabled
ROM BIOS NOT INSTALLED

<CTRL-Q> Detected, Initialization in progress, Please wait...
```

Figure 3-9. Starting Fast!UTIL from the BIOS Screen

3. In the *Fast!UTIL* utility, choose the appropriate adapter port to be configured.
4. On the *Fast!UTIL* Options page, select **Configuration Settings**, and then press ENTER.
5. On the Configuration Settings page, select **Host Adapter Settings**, and then press ENTER.
6. To set the BIOS to search for SCSI devices:
 - a. On the Host Adapter Settings page, select **Host Adapter BIOS**.
 - b. To toggle the value to **Enabled**, press ENTER.
 - c. To exit, press ESC.

7. After the **Host Adapter BIOS** is enabled, select the boot device as shown in the following table.

Enable Selectable Boot	WWPN or LUN Boot List	Device Boot
No	x	BIOS configures the first disk drive it finds as boot device.
Yes	None specified	BIOS configures the first disk drive it finds that is also a LUN 0 as boot device.
Yes	Specified	BIOS scans through the specified boot WWPN or LUN list until it finds a disk drive, and then configures it as the boot device.

- a. Choose **Selectable Boot Settings**, and then press ENTER.
 - b. On the Selectable Boot Settings page, choose **Selectable Boot**.
 - c. Toggle the value to **Enabled**, and then press ENTER.
8. After the Selectable Boot is enabled, select the boot device. Marvell Converged Network Adapters allow the specification of up to four WWPNS or LUNs as boot devices. To select up to four boot devices, follow these steps:
- a. To move to the **Primary** location of the **Selectable Boot List** menu, press the DOWN ARROW key.
 - b. To see a list of accessible devices in the **Select Fibre Channel Device** menu, press ENTER.
 - c. Press the DOWN ARROW key to scroll down to the device you want to put into your **Selectable Boot** menu list.
 - d. To select the requested device and load it into the **Selectable Boot** menu list, press ENTER.
 - e. (Optional) Repeat this step to specify up to three alternate boot devices.

Now the ESX system is ready to boot from SAN from the specified boot devices.

NOTE

Marvell recommends that when both the adapter BIOS and the **Selectable Boot** option are enabled, you always select a device and put it in the **Primary** boot device location of the **Selectable Boot** menu list.

To configure the Marvell Converged Network Adapter for boot from SAN using the QConvergeConsole plug-in for VMware vCenter Server:

For detailed information on how to use the vCenter Server plug-in to configure boot from SAN, refer to the *User's Guide: Marvell QLogic QConvergeConsole Plug-ins for vSphere*, in the section Boot Configuration—FCoE Function.

For instructions on downloading documentation from the Marvell Web site, refer to [“Downloading Updates and Documentation” on page xiii](#).

A Troubleshooting

This appendix provides the following methods of determining the status of the adapters and finding solutions to common problems:

- [Troubleshooting with LEDs](#)
- [“Dynamic Extended Logging” on page 46](#)
- [“Troubleshooting with Driver Logs” on page 48](#)
- [“Debugging Using vmkmgmt_keyval Information” on page 51](#)
- [“Collecting System Logs for Troubleshooting” on page 52](#)
- [“Frequently Seen Issues” on page 52](#)

Troubleshooting with LEDs

Marvell Fibre Channel and Converged Network Adapters have LEDs that can help you diagnose problems. Typically, administrators observe the LED patterns to perform first-level troubleshooting that can indicate some obvious firmware or hardware issues.

For detailed information on the LED patterns for a specific Marvell Fibre Channel and Converged Network Adapter, refer to the appropriate user’s guide for that adapter (see [“Related Materials” on page ix](#)). For instructions on downloading documentation from the Marvell Web site, see [“Downloading Updates and Documentation” on page xiii](#).

Dynamic Extended Logging

This section applies to 2600/2700/2800 Series Fibre Channel Adapters (does *not* apply to 41000/45000 Series Adapters).

The Marvell qlnativefc driver provides a mechanism to dynamically enable extended error logging about driver operation. These logs provide debugging and error information to help you understand driver behavior regarding issues related to the adapter. These logs are saved in a system log file named `vmkernel`, in the `/var/log/` directory.

To enable extended error logging, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i MOD_PARM/qlogic  
-s scsi-qlaenable-log -k DRIVERINFO
```

To disable extended error logging, issue the following command:

```
# /usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i MOD_PARM/qlogic  
-s scsi-qladisable-log -k DRIVERINFO
```

When logging is enabled, the driver version in the `vmkmgmt_keyval` output is appended with a `-debug` flag as shown in the following examples.

ESXi debug example:

```
/usr/lib/vmware/vmkmgmt_keyval/vmkmgmt_keyval -i vmhba<x>/qlogic -k ADAPTER -g
```

Where `vmhba<x>` is one of the adapter's keyval numbers.

```
QLogic 16Gb 2-port FC to PCIe Gen3 x8 Adapter for QLE2692:  
FC Firmware Version: 8.03.03 (d0d5), Driver version  
3.1.29.0-debug
```

```
Host Device Name vmhba70
```

```
BIOS version 3.33
```

```
FCODE version 4.11
```

```
EFI version 6.13
```

```
Flash FW version 8.03.03
```

```
ISP: ISP2261, Serial# RFD1723T38823
```

```
MSI-X enabled
```

```
Request Queue = 0x430b994d4000, Response Queue = 0x430b994f5000
```

```
Request Queue count = 2048, Response Queue count = 512
```

```
Number of response queues for CPU affinity operation: 4
```

```
CPU Affinity mode enabled
```

NOTE

Although the driver logs provide debugging and error information, they also increase I/O latency. Therefore, Marvell does not recommend that you enable extended logging during normal operations.

Troubleshooting with Driver Logs

All messages from the Marvell Fibre Channel Adapter qlnativefc driver are logged in `/var/log/vmkernel.log`. These messages provide additional information about the driver operation, both normal and driver warnings. This section applies to 2600/2700/2800 Series Fibre Channel Adapters (does *not* apply to 41000/45000 Series Adapters).

- Messages from the driver are usually preceded by `qlnativefc: vmhbaX (CX:TX.LX)`, where:
 - X is the adapter instance number.
 - C is the channel number.
 - T is the target number.
 - L is the LUN number.

Figure A-1 shows a snapshot from a `vmkernel` log file

```
2013-02-20T17:44:12.270Z cpu0:139161)ALERT: [I2S] Customize system/Installer screen.
2013-02-20T17:44:14.797Z cpu1:32779)qlnativefc: vmhba10(41:0.6): DCBX Completed -- 0000 0000 0000
2013-02-20T17:44:14.997Z cpu1:32779)qlnativefc: vmhba10(41:0.6): qla24xx_report_id_acquisition:format 1: scsi(3): VP[0] enabled - status
261
2013-02-20T17:44:15.016Z cpu1:32779)qlnativefc: vmhba10(41:0.6): Asynchronous LOOP UP (10 Gbps).
2013-02-20T17:44:15.016Z cpu1:32779)qlnativefc: vmhba10(41:0.6): LOOP UP detected (10 Gbps).
2013-02-20T17:44:15.016Z cpu1:32780)qlnativefc: vmhba10(41:0.6): Asynchronous PORT UPDATE.
2013-02-20T17:44:15.016Z cpu1:32780)qlnativefc: vmhba10(41:0.6): Port database changed ffff 0006 0000.
2013-02-20T17:44:15.021Z cpu1:32929)qlnativefc: vmhba10(41:0.6): Asynchronous PORT UPDATE ignored 0000/0007/0b00.
2013-02-20T17:44:15.127Z cpu1:33302)qlnativefc: vmhba10(41:0.6): qla2x00_reset_marker()
2013-02-20T17:44:15.127Z cpu1:33302)qlnativefc: vmhba10(41:0.6): qla2x00_loop_resync() - start
2013-02-20T17:44:15.140Z cpu1:33302)qlnativefc: vmhba10(41:0.6): F/W Ready - OK
2013-02-20T17:44:15.155Z cpu1:33302)qlnativefc: vmhba10(41:0.6): fw_state=3 curr_time=144801797978070.
2013-02-20T17:44:15.170Z cpu1:33302)qlnativefc: vmhba10(41:0.6): vlan_id: 0x3ea
2013-02-20T17:44:15.170Z cpu1:33302)qlnativefc: vmhba10(41:0.6): vn_port_mac_address: 0e:fc:00:e6:02:61
2013-02-20T17:44:15.170Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Configure loop -- dpc flags = 0x10860
2013-02-20T17:44:15.201Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RSCN queue entry[0] = [00/000000].
2013-02-20T17:44:15.201Z cpu1:33302)qlnativefc: vmhba10(41:0.6): device_resync: rscn overflow.
2013-02-20T17:44:15.235Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RHBA exiting normally.
2013-02-20T17:44:15.251Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RPA exiting normally.
2013-02-20T17:44:15.281Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RFT_ID exiting normally.
2013-02-20T17:44:15.297Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RFF_ID exiting normally.
2013-02-20T17:44:15.313Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RNN_ID exiting normally.
2013-02-20T17:44:15.328Z cpu1:33302)qlnativefc: vmhba10(41:0.6): RSNN_NN exiting normally.
2013-02-20T17:44:15.422Z cpu1:33302)qlnativefc: vmhba10(41:0.6): GID_FT entry - nn 2000000e1e048d43 pn 21000000e1e048d43 portid=e60261.
2013-02-20T17:44:15.438Z cpu1:33302)qlnativefc: vmhba10(41:0.6): GID_FT entry - nn 2000000e1e048d47 pn 21000000e1e048d47 portid=e6028a.
2013-02-20T17:44:15.454Z cpu1:33302)qlnativefc: vmhba10(41:0.6): GID_FT entry - nn 2000000e1e05387b pn 21000000e1e05387b portid=e60293.
2013-02-20T17:44:15.469Z cpu1:33302)qlnativefc: vmhba10(41:0.6): GID_FT entry - nn 50060160c1e0f364 pn 5006016a41e0f364 portid=e602ef.
2013-02-20T17:44:15.469Z cpu1:33302)qlnativefc: vmhba10(41:0.6): device wrap (e602ef)
2013-02-20T17:44:15.469Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Trying Fabric Login w/loop id 0x0000 for port e6028a.
2013-02-20T17:44:15.485Z cpu1:33302)qlnativefc: vmhba10(41:0.6): qla24xx_login_fabric(3): failed to complete IOCB -- completion status
6.
2013-02-20T17:44:15.485Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Trying Fabric Login w/loop id 0x0001 for port e6028a.
2013-02-20T17:44:15.519Z cpu1:32779)qlnativefc: vmhba11(41:0.7): Asynchronous PORT UPDATE ignored 0003/0004/0600.
2013-02-20T17:44:15.530Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Fabric Login successful w/loop id 0x0001 for port e6028a.
2013-02-20T17:44:15.530Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Trying Fabric Login w/loop id 0x0002 for port e60293.
2013-02-20T17:44:15.576Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Fabric Login successful w/loop id 0x0002 for port e60293.
2013-02-20T17:44:15.576Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Trying Fabric Login w/loop id 0x0003 for port e602ef.
2013-02-20T17:44:15.608Z cpu1:33302)qlnativefc: vmhba10(41:0.6): Fabric Login successful w/loop id 0x0003 for port e602ef.
```

Figure A-1. Snapshot of Driver Log: ESXi 7.0 and 8.0

Table A-1 lists the most common driver log messages and provides an explanation of each.

Table A-1. Common Driver Log Messages: ESXi 7.0 and 8.0

qlnativefc:<dev driver string>: Found an ISPXXXX, iobase zzz
Driver is reporting which adapter it has found during initialization.
qlnativefc: <dev driver string>: LIP reset occurred (f8f7)
Driver received a LIP asynchronous event from the firmware.
qlnativefc: <dev driver string>:: LOOP UP detected (x Gbps) .
Driver received a loop up asynchronous event from the firmware.
qlnativefc: <dev driver string>:: LOOP DOWN detected mbx1=xxxh mbx2=yyyh mbx3=zzzh mbx4=iiih
Driver received a loop down asynchronous event from the firmware.
qlnativefc: <dev driver string>: Asynchronous P2P MODE received.
Driver received a point-to-point asynchronous event from the firmware.
QLogic Fibre Channel HBA Driver: 1.1.1.0
Driver is reporting information discovered during its initialization. This information includes the driver version.
qlnativefc: <dev driver string>: Loop down - aborting ISP.
Indicates that the driver is attempting to restart the loop by resetting the adapter. Usually done by the driver when sync is not detected by the firmware for a long time (4+ minutes), and usually means that the adapter port is not connected to the switch or loop.
qlnativefc: <dev driver string>: <dev driver string>: ISP System Error - mbx1=x mbx2=x mbx3=x mbx7=x
Driver received an asynchronous ISP system error event from the firmware. Additional information follows the message (that is, mailbox values from the firmware).
qlnativefc: <dev driver string>: Configuration change detected: value=x.
Driver received a change in connection async event from the firmware. Additional information follows the message (that is, mailbox 1 value from the firmware).
qlnativefc: <dev driver string>: Port database changed xx yy zz.
Driver received a port database asynchronous event from the firmware. Additional information follows the message (that is, mailbox 1 value from the firmware).

Table A-1. Common Driver Log Messages: ESXi 7.0 and 8.0 (Continued)

qlnativefc: <dev driver string>: RSCN database changed -- xx yy zz.
Driver received a registered state change notification (RSCN) asynchronous event from the firmware. Additional information follows the message (that is, mailbox values from the firmware).
qlnativefc: <dev driver string>: Cannot get topology - retrying
Firmware return status indicating it is busy.
qlnativefc: <dev driver string>: Cxx:Tyy:Lzz: DEVICE RESET ISSUED.
Indicates a device reset is being issued to (channel:target:lun).
qlnativefc: <dev driver string>: Cxx:Tyy:Lzz: BUS RESET ISSUED.
Indicates a loop reset is being issued to (channel:target:lun).
qlnativefc: <dev driver string>: Cxx:Tyy:Lzz: ADAPTER RESET ISSUED.
Indicates an adapter reset is being issued to (channel:target:lun).
qlnativefc: <dev driver string>: Unknown Device State: x
Indicates that the status returned from the firmware is not supported. %x-%x is the completion-scsi statuses.
qlnativefc: <dev driver string>: Cable is unplugged...
Indicates that the firmware state is in LOSS OF SYNC; therefore, the cable must be missing.
qlnativefc: <dev driver string>: Performing ISP error recovery - ha=p.
Indicates that the driver has started performing an adapter reset.
qlnativefc: <dev driver string>: qla2x00_abort_isp: **** FAILED ****
Indicates that the driver failed to perform an adapter reset.
qlnativefc: <dev driver string>: (Txx:Lyy): Mid-layer underflow detected (X of Y bytes)
Indicates that an underflow was detected.
qlnativefc: <dev driver string>: ERROR -- Unable to get host loop ID.
Firmware failed to return the adapter loop ID.
WARNING qlnativefc: <dev driver string>: [ERROR] Failed to allocate memory for adapter\n
Indicates that the driver could not allocate all the kernel memory it needed.
WARNING qlnativefc: <dev driver string>: Failed to initialize adapter-Adapter flags x.

Table A-1. Common Driver Log Messages: ESXi 7.0 and 8.0 (Continued)

Indicates that a previously occurring error is preventing the adapter instance from initializing normally.
WARNING qlnativefc: <dev driver string>: already in use.
Indicates that the driver could not register for the interrupt IRQ because it is in use by another driver.
WARNING qlnativefc: <dev driver string>: ISP Request Transfer Error (x)
Driver received a Request Transfer Error asynchronous event from the firmware.
WARNING qlnativefc: <dev driver string>: ISP Response Transfer Error
Driver received a Response Transfer Error asynchronous event from the firmware.
WARNING Error entry invalid handle
Driver detected an invalid entry in the ISP response queue from the firmware. This error will cause an ISP reset.
qlnativefc: <dev driver string>: MS entry - invalid handle
Driver detected a management server command time-out.

Debugging Using vmkmgmt_keyval Information

The vmkmgmt interface uses key-value pairs. The qlnativefc driver, through the vmkmgmt_keyval command interface, provides first-hand information about the current state of the driver, which is helpful when troubleshooting problems. This section applies to 2600/2700/2800 Series Fibre Channel Adapters (does *not* apply to 41000/45000 Series Adapters).

Table A-2 lists the vmkmgmt_keyval output fields and provides a description of each.

Table A-2. Output Fields for vmkmgmt_keyval

Output Field	Description
Boot Code Version	Provides the version of the boot code present on the adapter. A version of 0.00 indicates that the boot code is corrupted or not present, and must be updated to perform a <i>boot from SAN</i> (see “Configuring Boot from SAN” on page 24).
Number of ISP aborts	Provides the quantity of times the system chip has been reset. Typically, whenever the system NVRAM or Flash is updated, the chip is reset to use the updated information. Otherwise, the chip is reset only if an error occurs. This number thus provides a close approximation of whether the chip has been operating properly.

Table A-2. Output Fields for `vmkmgmt_keyval` (Continued)

Output Field	Description
Host adapter FC link state	Provides the connection state of the specified adapter. Possible values include the following: READY: Ready to perform I/Os. UPDATE: The topology is being rediscovered. DEAD: No connection. DOWN: Intermittent state, link temporarily down.
NPIV Supported	Indicates whether the given adapter node supports NPIV. If <code>yes</code> , the subsection provides the maximum quantity of virtual ports supported.
SCSI Device Information	Provides the WWN of the given adapter.
FC Port Information	Lists all Fibre Channel ports to which the specified adapter is connected. The last entry in this field indicates the login status of the port and whether the port is operating in <i>target</i> or <i>initiator</i> mode.
SCSI LUN Information	Lists all the LUNs visible to the specified adapter.

Collecting System Logs for Troubleshooting

To collect all relevant data on the running system into one `tar` file, issue the following command:

```
# vm-support
```

Frequently Seen Issues

[Table A-3](#) lists some common issues and questions and provides tips for their resolution.

Table A-3. Frequently Seen Issues

Issue	Troubleshooting Tip
One specific adapter in the system has performance issues, while all other adapters in the system are okay.	Ensure that the adapter is plugged into a slot that allows the adapter to use the full bandwidth available. Also check that the bus the adapter is on is not shared by other high-bandwidth PCI cards.

Table A-3. Frequently Seen Issues (Continued)

Issue	Troubleshooting Tip
<p>The following error occurs when the system is booted up. In addition, the ALT+Q QLogic BIOS banner is not shown; or <i>Fast!</i>UTIL is hanging when trying to flash the adapters.</p> <p>Device Resource allocation failure</p>	<p>There are too many devices taking up extended BIOS data area (EBDA) memory resources. To free up enough resources to allow the adapters to work properly, you can disable unused on-board services such as wake on LAN (WoL), PXE boot, and so on.</p>
<p>Different target numbers can be assigned to the various storage devices for the adapters on the SAN. What is the correct method to assign persistent bindings?</p>	<p>Marvell recommends that you assign the target numbers of the devices in the same order on multiple adapters. For example, if controller A of an array is assigned to target 0 on HBA0, you should assign controller B of an array to target 0 on HBA1, and then continue this same methodology for all targets and adapters. Note that the driver and OS must be reloaded for the changes to take effect.</p>
<p>Rescanning an adapter port for target or LUN discovery.</p>	<p># esxcfg-rescan vmhba<X></p> <p>You can find the <code>vmhba</code> value corresponding to an adapter port by examining the <code>/var/log/vmkernel.log</code>, where the adapter is assigned a <code>vmhba<X></code> vector.</p>

B Revision History

Document Revision History	
Revision A, May 30, 2014	
Revision B, March 27, 2015	
Revision C, February 22, 2016	
Revision D, January 17, 2017	
Revision E, March 7, 2017	
Revision F, September 22, 2017	
Revision G, May 11, 2018	
Revision H, January 18, 2019	
Revision J, September 20, 2019	
Revision K, October 24, 2019	
Revision L, October 31, 2019	
Revision M, November 22, 2019	
Revision N, May 8, 2020	
Revision P, February 22, 2021	
Revision R, April 9, 2021	
Revision T, August 30, 2021	
Revision W, October 12, 2022	
Revision X, March 25, 2023	
Revision Y, November 17, 2023	
Revision Z, June 10, 2024	
Changes	Sections Affected
Removed support for 8300 and 8400 Series Marvell Converged Network Adapters.	All sections.
Removed support for Marvell QLogic 8Gb Fibre Channel Adapters.	All sections.
Changed references of VM-ID to VMID.	All sections.
Added ESXi 8.0U3 support.	“Supported Operating Systems” on page viii.

Changed install command to apply command: <code>esxcli software component apply -n /<path>/ driver-component.zip.</code> Added a NOTE about ESXi 8.0 U3 and how it works with VC UUIDs. Added section. Removed text describing Ethernet adapters. Added section. (Ethernet content removed from “Configuring Boot from SAN” on page 24 moved here)	“Installing the Asynchronous Fibre Channel Driver” on page 10. “Deploying VMID for VMware ESXi 7.0 and 8.0” on page 24 “Enabling USCM FPIN-LI/MPIO” on page 24 “Configuring Boot from SAN” on page 24 “Configuring Boot from SAN” on page 41
--	--

Glossary

adapter

The board that interfaces between the host system and the target devices. Adapter is synonymous with *host bus adapter (HBA)*, *host channel adapter (HCA)*, *host adapter*, and *adapter board*.

arbitrated loop

A circular (ring) topology (versus point-to-point) where two or more [ports](#) can be interconnected, but only two ports can communicate at a time. All communication passes through all ports connected to the loop.

adapter port

A port on the adapter board.

address resolution protocol

See [ARP](#).

API

Application programming interface. A set of routines, protocols, and tools for building software applications. API simplifies development by providing the building blocks.

ARP

Address resolution protocol. A TCP/IP function to associate an IP address with a link-level address.

basic input output system

See [BIOS](#).

BIOS

Basic input output system (typically in Flash PROM). The program (or utility) that serves as an interface between the hardware and the operating system and allows booting from the adapter at startup.

boot code

The program that initializes a system or an adapter. Boot code is the first program to run when a system or a device within a system, such as an adapter, is powered on. FCode, [BIOS](#), and EFI (enhanced firmware interface) are all forms of boot code for specific hardware and operating system environments.

Boot code for Marvell Fibre Channel Adapters is required if the computer system is booting from a storage device (disk drive) attached to the adapter. The primary function of the boot code is communication with the external boot device before the operating system is up and running. Boot code can also perform secondary functions, including managing the setup for the adapter and initializing and testing the adapter's [ISP](#).

boot device

The device, usually a the hard disk, that contains the operating system the [BIOS](#) uses to boot from when the computer is started.

boot from SAN

The ability for each server on a network to boot their operating system from a Fibre Channel RAID unit located on the SAN, rather than from a local disk or direct-attached storage (DAS). This enables easier SAN management because you can replace a server and boot it from the Fibre Channel RAID unit.

CIM

Common information model. Provides a common definition of management information for systems, networks, applications, and services, and allows for vendor extensions. CIM's common definitions enable vendors to exchange semantically rich management information between systems throughout the network.

CIM is composed of a specification and a schema. The schema provides the actual model descriptions, while the specification defines the details for integration with other management models. SMI-S 1.5.0 is based on CIM Schema 2.23.

Converged Network Adapter

Marvell Converged Network Adapters support both data networking (TCP/IP) and storage networking ([Fibre Channel](#)) traffic on a single I/O adapter using two new technologies: Enhanced Ethernet and Fibre Channel over Ethernet ([FCoE](#)).

data center bridging

See [DCB](#).

data center bridging exchange

See [DCBX](#).

DCB

Data center bridging. Provides enhancements to existing 802.1 bridge specifications to satisfy the requirements of protocols and applications in the data center. Because existing high-performance data centers typically comprise multiple application-specific networks that run on different link layer technologies (Fibre Channel for storage and Ethernet for network management and LAN connectivity), DCB enables 802.1 bridges to be used for the deployment of a converged network where all applications can be run over a single physical infrastructure.

DCBX

Data center bridging exchange. A protocol used by [DCB](#) devices to exchange configuration information with directly connected peers. The protocol may also be used for misconfiguration detection and for configuration of the peer.

device

A [target](#), typically a disk drive. Hardware such as a disk drive, tape drive, printer, or keyboard that is installed in or connected to a system. In [Fibre Channel](#), a *target* device.

DHCP

Dynamic host configuration protocol. Enables computers on an IP network to extract their configuration from servers that have information about the computer only after it is requested.

driver

The software that interfaces between the file system and a physical data storage device or network media.

dynamic host configuration protocol

See [DHCP](#).

E_Port

Expansion port. A port in a Fibre Channel switch that connects to another Fibre Channel switch or bridge device by an inter-switch link (ISL)). E_Ports are used to link Fibre Channel switches to form a multi-switch fabric.

Enhanced Ethernet

Also called *data center Ethernet* or *converged enhanced Ethernet*. Refers to new enhancements to the existing [Ethernet](#) standard that eliminate Ethernet's inherent lossy nature and make 10Gb Ethernet a viable storage networking transport.

Ethernet

The most widely used LAN technology that transmits information between computers, typically at speeds of 10 and 100 million bits per second (Mbps).

expansion port

See [E_Port](#).

F_Port

Fabric port. The “fabric” port in a Fibre Channel [fabric switch](#) provides a point-to-point link attachment to a single [N_Port](#). F_Ports are intermediate ports in virtual point-to-point links between end ports, for example N_Port to F_Port to F_Port to N_Port using a single Fibre Channel fabric switch.

fabric

A fabric consists of cross-connected Fibre Channel devices and switches.

fabric loop port

See [FL_Port](#).

fabric port

See [F_Port](#).

fabric switch

Also, switched fabric. Connects multiple devices from independent Fibre Channel-arbitrated loops (FC-ALs) and point-to-point topologies into a fabric using Fibre Channel switches.

Fast!UTIL

Marvell *Fast!UTIL*™ Fibre Channel Adapter BIOS utility.

FC-NVMe

NVM Express over Fibre Channel (FC) is a feature of Marvell QLogic FC adapters that provides low latency and high performance data transfer between a host and a peripheral target storage device or system.

Fibre Channel

A high-speed serial interface technology that supports other higher layer protocols such as SCSI and IP.

FCode

Forth code. A type of boot code for use on Sun®'s SPARC® or Macintosh® hardware platforms. See also [boot code](#) and [Flash](#).

FCoE

Fibre Channel over Ethernet. A new technology defined by the T11 standards body that allows traditional Fibre Channel storage networking traffic to travel over an Ethernet link by encapsulating Fibre Channel frames inside Layer 2 Ethernet frames. For more information, visit www.fcoe.com.

Fibre Channel over Ethernet

See [FCoE](#).

firmware

Low-level software typically loaded into read-only memory and used to boot and operate an intelligent device.

FL_Port

Fabric loop port. In a Fibre Channel, the fabric switch is capable of Fibre Channel Arbitrated Loop operations and is connected to one or more NL_Ports by a Fibre Channel Arbitrated Loop. An FL_Port becomes a shared entry point for public NL_Port devices to a Fibre Channel fabric. FL_Ports are intermediate ports in virtual point-to-point links between end ports that do not reside on the same loop, for example NL_Port to FL_Port to F_Port to N_Port through a single Fibre Channel fabric switch.

Flash

Non-volatile memory where the [boot code](#) is saved. At times, the terms *Flash* and *boot code* are used interchangeably.

generic port

See [G_Port](#).

G_Port

Generic port. A port that can operate as either an E_Port or an F_Port. A G_Port can determine operating mode at switch port initialization, F_Port when an N_Port attachment is determined, E_Port when an E_Port attachment is determined. See [E_Port](#), [F_Port](#), [FL_Port](#), [L_Port](#), [N_Port](#), [NL_Port](#)

HBA

Host bus adapter. See [adapter](#).

HII

Human interface infrastructure is a specification (part of UEFI 2.1) for managing user input, localized strings, fonts, and forms, that allows OEMs to develop graphical interfaces for preboot configuration.

human interface infrastructure

See [HII](#).

iiDMA

Intelligent interleaved direct memory access. A Marvell feature that ensures maximum link efficiency.

input/output control

See [ioctl](#).

intelligent interleaved direct memory access

See [iiDMA](#).

intelligent storage peripheral

See [ISP](#).

ioctl

Input/output control. A system call in UNIX and Linux systems. Allows an application to control or communicate with a device driver outside usual read/write operations.

ISP

Intelligent storage peripheral. Marvell trademark and family of Fibre Channel and SCSI controller chips that replace network interface chips in network adapters, servers, and storage.

L_Port

Loop port. Does arbitrated loop functions and protocols. NL_Ports and FL_Ports are examples of loop-capable ports. See [E_Port](#), [F_Port](#), [FL_Port](#), [G_Port](#), [N_Port](#), [NL_Port](#).

LED

Light-emitting diode. Status indicator on a switch, router, adapter, or other device.

light-emitting diode

See [LED](#).

LIP

Loop initialization process. The initialization process in an arbitrated loop that occurs when the loop is powered up or a new device is added. One function of a LIP is to assign addresses. All data transmission on the loop is suspended during a LIP.

loop initialization process

See [LIP](#).

logical unit number

See [LUN](#).

loopback

Diagnostic tool that routes transmit data through a loopback connector back to the same adapter.

LUN

Logical unit number, a subdivision of a SCSI target. It is the small integer handle that differentiates an individual disk drive or partition (volume) within a common SCSI target device such as a disk array.

Technically, a LUN can be a single physical disk drive, multiple physical disk drives, or a portion (volume) of a single physical disk drive. However, LUNs are typically not entire disk drives but rather virtual partitions (volumes) of a RAID set.

Using LUNs, the Fibre Channel host can address multiple peripheral devices that may share a common controller.

media

Physical-layer information carriers. Fibre Channel supports several different physical media: copper, multimode optical, and single-mode optical. All Fibre Channel protocols are supported on all media.

message signaled interrupts

See [MSI](#), [MSI-X](#).

MSI, MSI-X

Message signaled interrupts. An alternate way of generating an interrupt with special messages to allow PCI to emulate a pin assertion or deassertion. Message signaled interrupts allow the device to write a small amount of data to a special address in memory space. The chipset will deliver the corresponding interrupt to a CPU. MSI-X (defined in PCI 3.0) allows a larger number of interrupts (up to 2048), and gives each one a separate target address and data word.

N_Port

Node port. A port that connects by a point-to-point link to either a single N_Port or a single [F_Port](#). N_Ports handle creation, detection, and flow of message units to and from the connected systems. N_Ports are end ports in virtual point-to-point links through a fabric, for example N_Port to F_Port to F_Port to N_Port using a single Fibre Channel fabric switch. See also [FL_Port](#).

N_Port ID virtualization

See [NPIV](#).

NIC

Network interface card or network interface controller. A computer circuit board or card that is installed in a computer so that it can be connected to a network.

NL_Port

Node loop port. A port capable of arbitrated loop functions and protocols. An NL_Port connects through an arbitrated loop to other NL_Port and at most a single FL_Port. NL_Ports handle creation, detection, and flow of message units to and from the connected systems. NL_Ports are end ports in virtual point-to-point links through a fabric, for example NL_Port to F_Port to F_Port to N_Port using a single Fibre Channel fabric switch. In the absence of a fabric switch FL_Port, NL_Ports can communicate with other NL_Ports in virtual point-to-point links through a FC_AL open loop circuit often through FC_AL (arbitrated Loop) hub or loop switch devices. See: [E_Port](#), [F_Port](#), [FL_Port](#), [G_Port](#), [N_Port](#).

node loop port

See [NL_Port](#).

node port

See [N_Port](#).

NPIV

The ability for a single physical Fibre Channel end point ([N_Port](#)) to support multiple, uniquely addressable, logical end points. With NPIV, a host Fibre Channel Adapter is shared in such a way that each virtual adapter is assigned to a virtual server and is separately identifiable within the fabric. Connectivity and access privileges within the fabric are controlled by identification of each virtual adapter and, hence, the virtual server using each virtual adapter.

NVRAM

Non-volatile random access memory. A type of memory that retains data (configuration settings) even when power is removed. You can manually configure NVRAM settings or restore them from a file.

path

A path to a device is a combination of a adapter [port instance](#) and a target port as distinct from internal paths in the fabric network. A fabric network appears to the operating system as an opaque network between the adapter (initiator) and the target.

Because a path is a combination of an adapter and a target port, it is distinct from another path if it is accessed through a different adapter or it is accessing a different target port. Consequently, when switching from one path to another, the driver might be selecting a different adapter (initiator), a different target port, or both.

This is important to the driver when selecting the proper method of failover notification. It can make a difference to the target device, which might have to take different actions when receiving retries of the request from another initiator or on a different port.

PLOGI

Port login. A port login occurs in a Fibre Channel SAN when two node ports establish a connection between each other (typically a device such as a Fibre Channel Adapter connecting to a switch).

point-to-point

Also FC-P2P. Two Fibre Channel nodes directly connected (not in a loop).

port

Access points in a device where a link attaches. The most common port types are:

- **N_Port**—a Fibre Channel port that supports point-to-point topology.
- **NL_Port**—a Fibre Channel port that supports loop topology.
- **F_Port**—a port in a fabric where an N_Port can attach.
- **FL_Port**—a port in a fabric where an NL_Port can attach.

port instance

The number of the port in the system. Each adapter may have one or multiple ports, identified with regard to the adapter as port 0, port 1 and so forth. To avoid confusion when dealing with a system containing numerous ports, each port is assigned a port instance number when the system boots up. So Port 0 on an adapter might have a port instance number of, for example, 8 if it is the eighth port discovered by the system.

port login

See [PLOGI](#).

QoS

Quality of service. Refers to the methods used to prevent bottlenecks and ensure business continuity when transmitting data over virtual ports by setting priorities and allocating bandwidth.

quality of service

See [QoS](#).

registered state change notification

See [RSCN](#).

RSCN

Registered state change notification (RSCN) is a Fibre Channel fabric notification sent to all specified nodes when any major fabric changes occur. This notification allows nodes to immediately gain knowledge about the fabric and react accordingly.

SAN

Storage area network. Multiple storage units (disk drives) and servers connected by networking topology.

SCSI

Small computer system interface. A high-speed interface used to connect devices—such as hard drives, CD drives, printers, and scanners—to a computer. The SCSI can connect many devices using a single controller. Each device is accessed by an individual identification number on the SCSI controller bus.

small computer system interface

See [SCSI](#).

target

The storage-device endpoint of a [SCSI](#) session. Initiators request data from targets (usually disk-drives, tape-drives, or other media devices). Typically, a SCSI peripheral device is the target but an adapter may, in some cases, be a target. A target can contain many [LUNs](#).

A target is a device that responds to a request by an initiator (the host system). Peripherals are targets, but for some commands (for example, a SCSI COPY command), the peripheral may act as an initiator.

UEFI

Unified extensible firmware interface. A specification detailing an interface that helps hand off control of the system for the pre-boot environment (that is, after the system is powered on, but before the operating system starts) to an operating system, such as Windows or Linux. UEFI provides a clean interface between operating systems and platform firmware at boot time, and supports an architecture-independent mechanism for initializing add-in cards.

unified extensible firmware interface

See [UEFI](#).

USCM

SAN congestion management (SCM) is a common noun, and describes a standards-based Fibre Channel technology. Universal SAN Congestion Mitigation (USCM) is Marvell's IP, and describes Marvell's SCM feature set.

world wide port name

See [WWPN](#).

WWPN

World wide port name. Unique 64-bit address assigned to each port on a device. One WWNN may contain multiple WWPN addresses.



Marvell first revolutionized the digital storage industry by moving information at speeds never thought possible. Today, that same breakthrough innovation remains at the heart of the company's storage, networking and connectivity solutions. With leading intellectual property and deep system-level knowledge, Marvell semiconductor solutions continue to transform the enterprise, cloud, automotive, industrial, and consumer markets. For more information, visit www.marvell.com.

© 2024 Marvell. All rights reserved. The MARVELL mark and M logo are registered and/or common law trademarks of Marvell and/or its Affiliates in the US and/or other countries. This document may also contain other registered or common law trademarks of Marvell and/or its Affiliates.

Doc No. SN0154529-00 Rev. Z Revised: June 10, 2024